



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Huawei MediaPad T2 10.0 Pro Rear camera

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Professional Double
Plastic Device
Opening Tool

1,52 €



Opening tool
Smartphone, tablet

2,19 €



JM-8142 Screwdriver
Kit with 24 Heads

11,24 €



Pinza antiestática
ESD redondeada

3,06 €



Touch ESD glove, for
antistatic protection,
size M

4,16 €

Step 1 - Remove back casing







To remove the back cover, we will have to remove the screw that is behind the cover where the SD card goes. Then, with an opening tool, we will lever until unhooking it from the notches that hold it.







Step 2 - Disconnect components


Remove the Phillips screws (PH # 00) that hold the motherboard and disconnect the components.

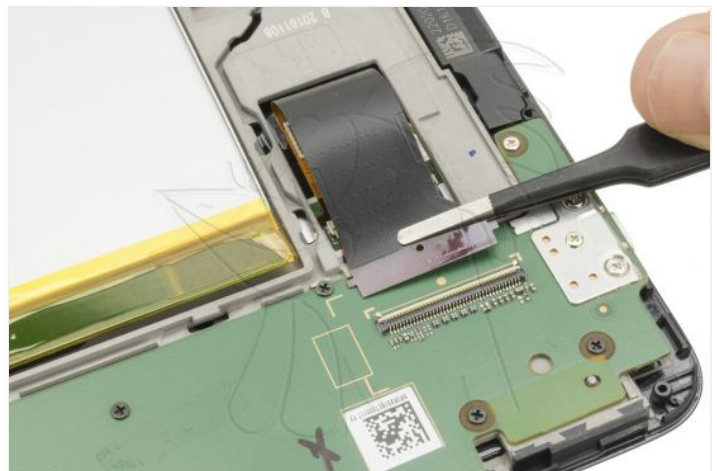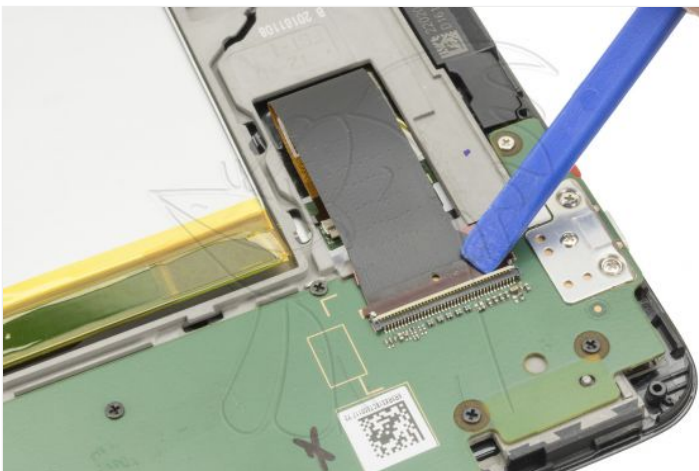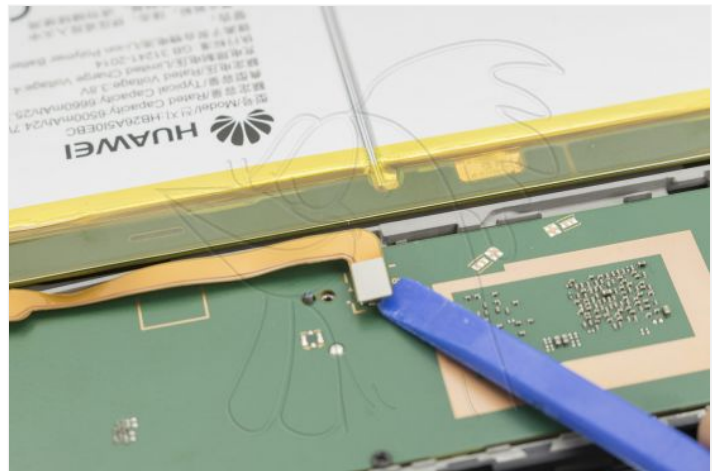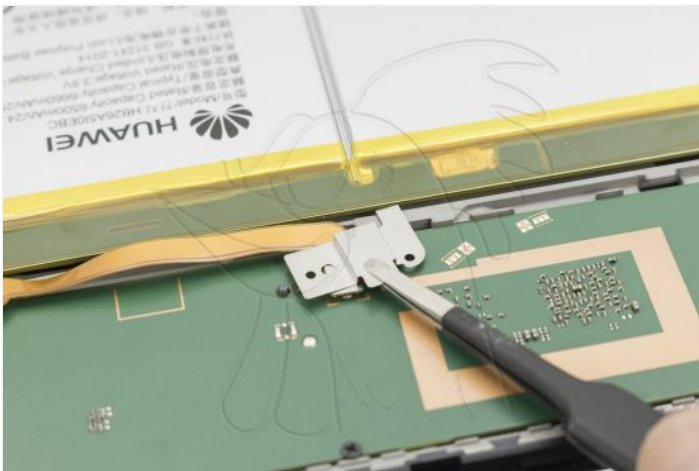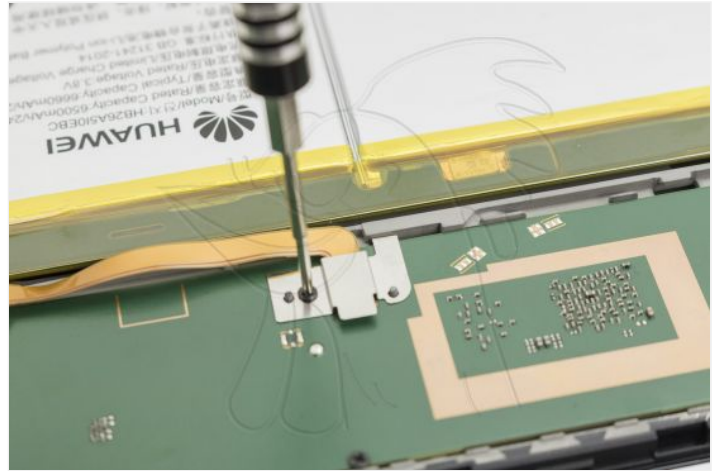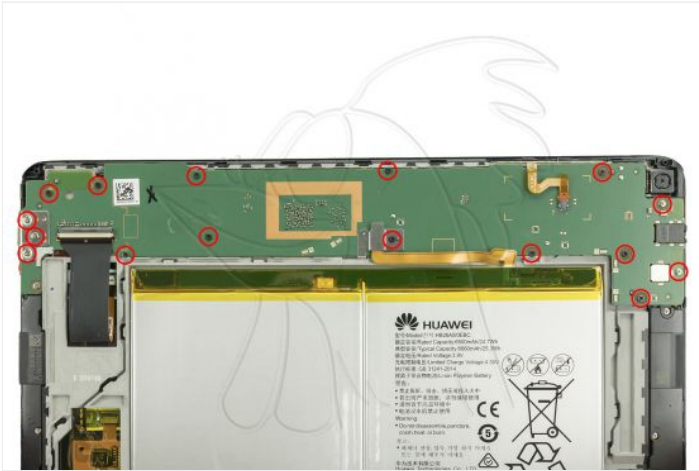

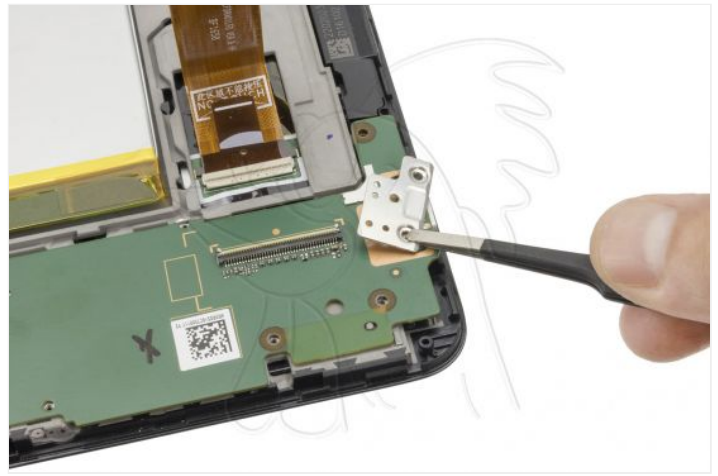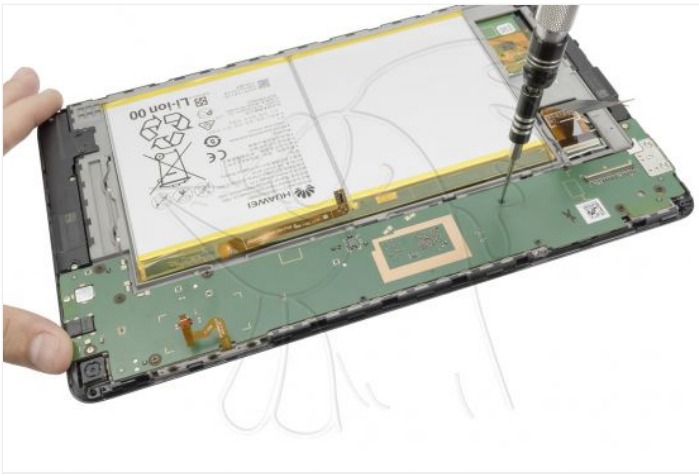

Step 3 - Removing the motherboard

Once the components have been disconnected and the screws removed, only the camera needs to be detached in order to disengage the chassis plate.

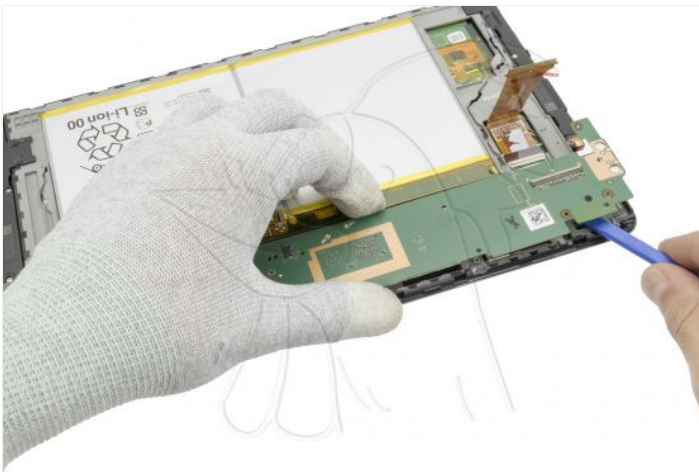

Step 4 - Rear camera

All you have to do is unplug the camera from the motherboard.

