



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Huawei MediaPad M3 8.0 Vibrator

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Heat-opening thermal mat, CPB320

69,61 €



Opening tool
Smartphone, tablet

2,19 €



Pinza antiestática
ESD redondeada

3,06 €



Set of professional
tools for opening
smartphones and
tablets

18,97 €



Special SAT 0.70mm
PET pick, high friction
and resistance

1,25 €



Smartphones and PC
repair tool case

35,92 €



Motor vibrator for
Huawei G8

1,04 €

Step 1 - Take off screen

To start, we will heat the screen at about 60°C for about 1 minute.

With the hot screen, we will introduce an opening tool between it and the frame. Sliding it around the contour, we will get the screen off.


We will take special care in the lower part that is where the flex cables are located.








Step 2 - Disconnect screen

Once the screen is detached, we will have to remove the shield that covers the connectors and disconnect them to be able to remove it.

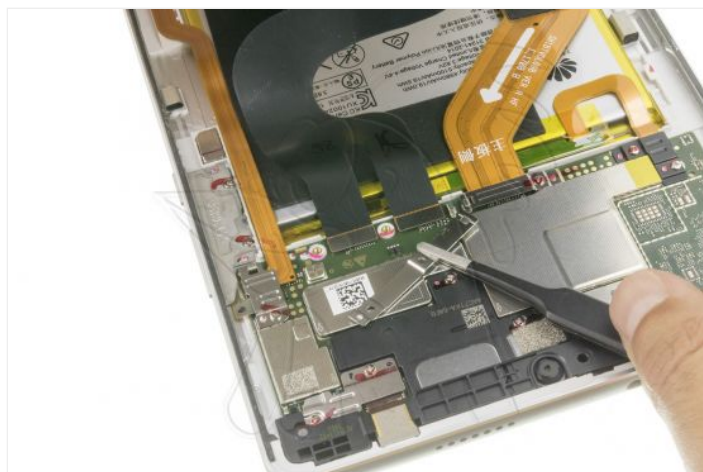

Step 3 - Remove auxiliary board

Remove the ten Phillips screws (PH # 00) that are located on the bottom and that hold the lower speaker module, the shields and the brackets. We disconnected the interconnection flex and we can remove the plate.

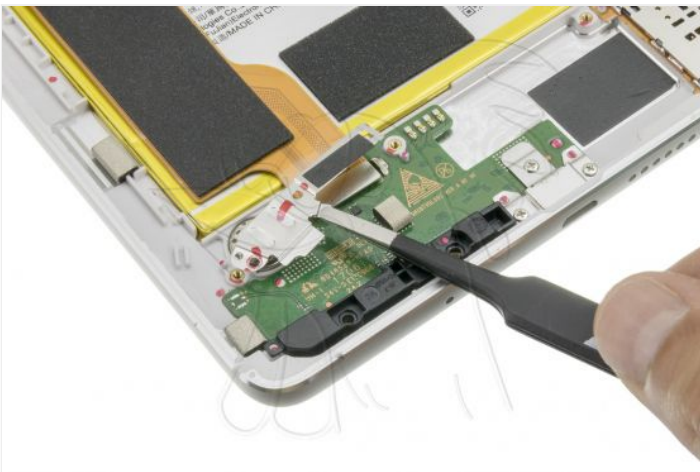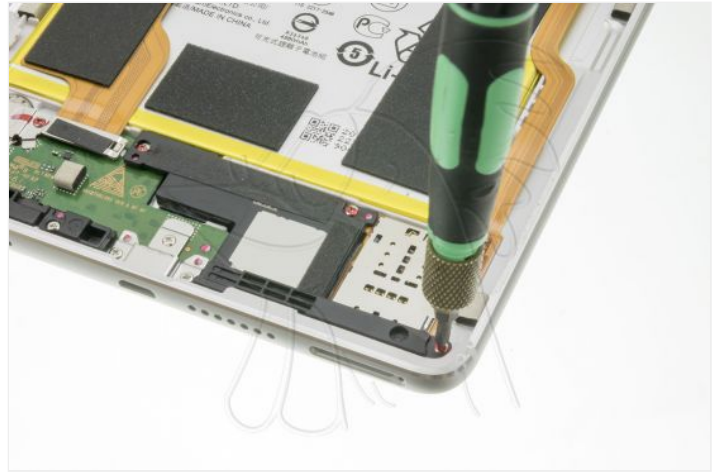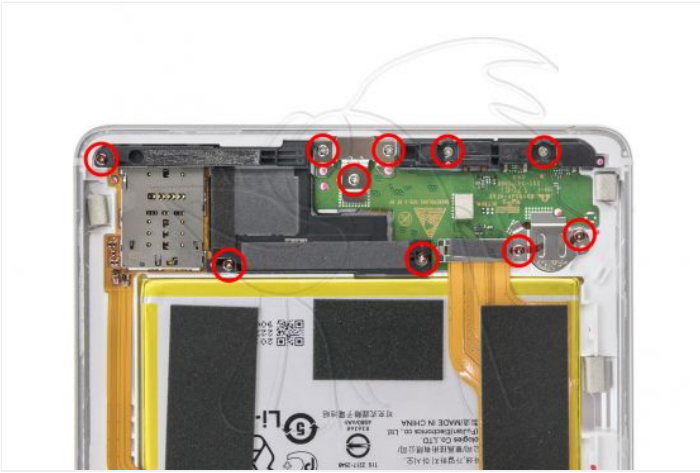



Step 4 - Vibrator

We only have to take off the chassis vibrator.



