



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Wiko View 2 GO Motherboard

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Set of 5 metal picks
for opening

3,09 €



BK-7275 (A Version)
5 in 1 screwdriver

6,41 €





PINZAS PUNTAS
CURVAS
PROFESIONAL

4,98 €

Step 1 - Opening

With the metal tine tool we remove the back cover.

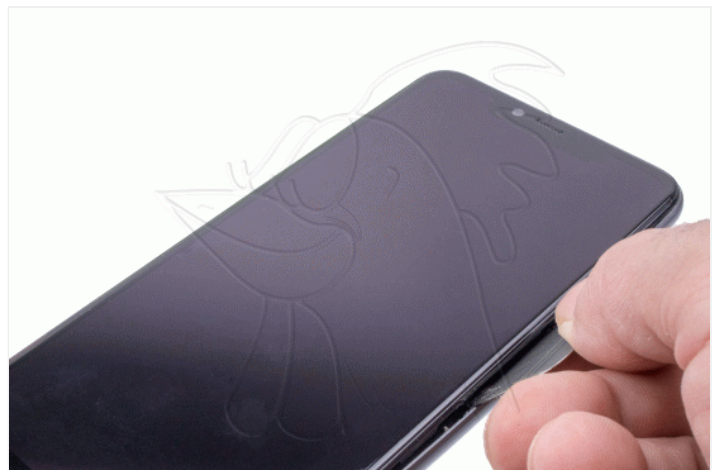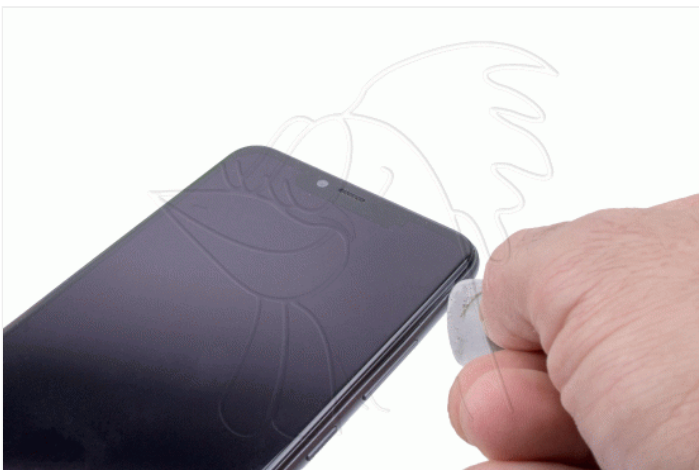




Step 2 - Remove baseboard shield

Remove the 7 Phillips screws (PH # 00) that hold the shield of the motherboard. With the opening tool remove the shield.



Step 3 - Remove motherboard

Remove the Phillips screw (PH # 00) that holds the motherboard. With the opening tool lift the base plate, release the coaxial cable and remove the base plate.

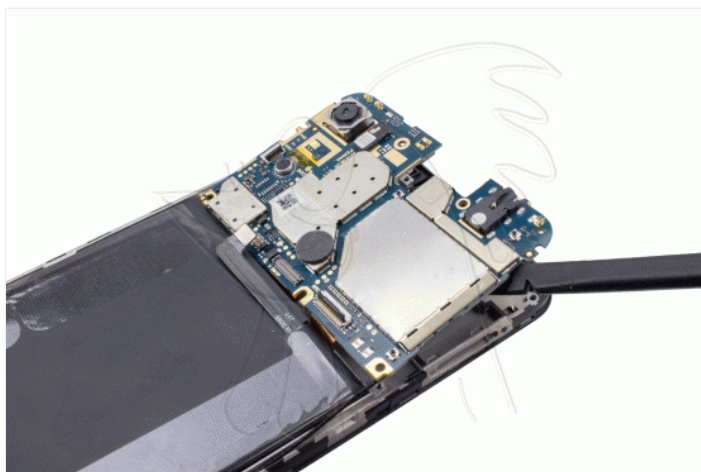

Step 4 - Remove front camera

With the opening tool release the connection of the camera and remove it with the clamps.





Step 5 - Remove rear camera

With the opening tool release the connection of the camera and remove it.

