



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Samsung Galaxy A7 (2018) Auxiliary plate with antenna

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Heat-opening thermal mat, CPB320

69,61 €



SIM card removal tool for all brands

1,61 €



Opening tool Smartphone, tablet

2,19 €



Pinza antiestática ESD redondeada

3,06 €



Special SAT 0.75mm high friction PVC pick

1,07 €



PREMIUM screwdriver with 24 magnetic replacement bits


10,41 €

Step 1 - Back cover and SIM tray

We remove the SIM tray with a SIM removal tool.

We heat the back shell at 80° for one minute. We introduce a metal opening tool to slightly separate the back cover, when we have access, we can introduce a metal pick and then a plastic pick, so as not to scratch the back cover. We will do all the contour to take it off completely.




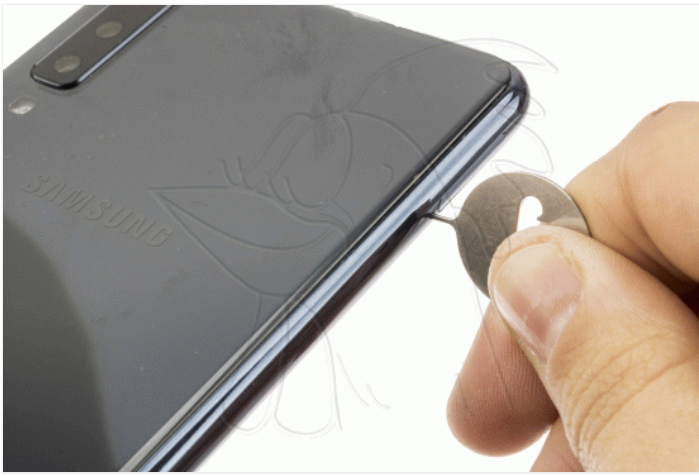

Step 2 - Intermediate frame

Unscrew the Phillips screws (PH # 00) of the intermediate housing.

We introduce a tool to separate the intermediate casing and to remove it.

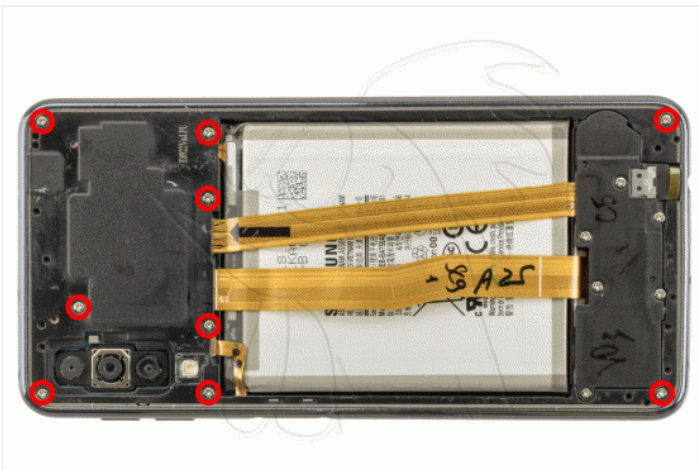




Step 3 - Antenna

Unscrew the Phillips screws (PH # 00) that hold the antenna housing with the phone. We remove it.



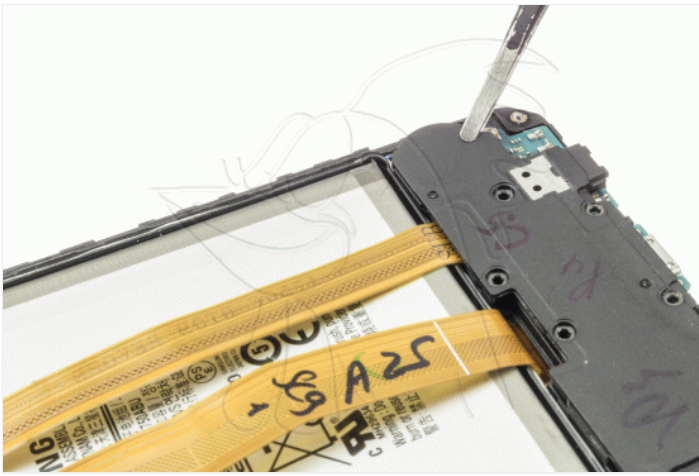

Step 4 - Auxiliary plate with antenna

We disconnect the coaxial cable.

We take off the auxiliary plate with antenna and remove it.

