



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Samsung Galaxy Tab A (2018) Audio connector

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Audio jack flex
connector for tablet
Samsung Galaxy Tab
A 10.5 T595 / Tab A

3,10 €



Opening tool
Smartphone, tablet

2,19 €



Pinza antiestática
ESD redondeada

3,07 €



Set of professional
tools for opening
smartphones and
tablets

18,97 €



PREMIUM
screwdriver with 24
magnetic
replacement bits

10,41 €






Antistatic and ESD
tactile glove, size S

5,30 €

Step 1 - Remove back cover


We start by removing the SIM / SD tray. Then we will leverage the entire contour, with a flat tool, to separate the chassis housing.

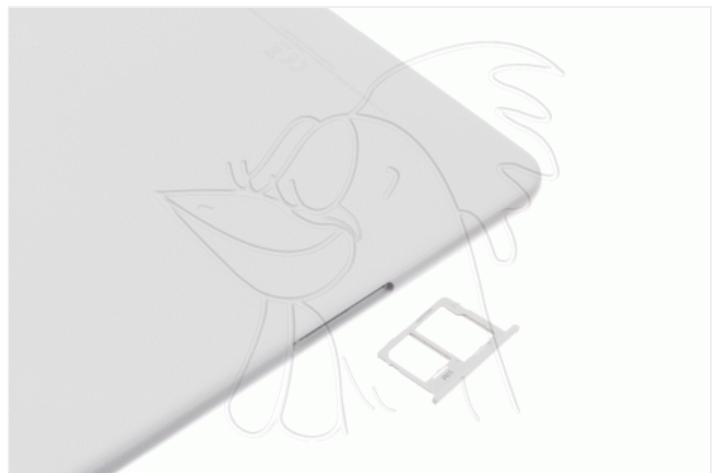


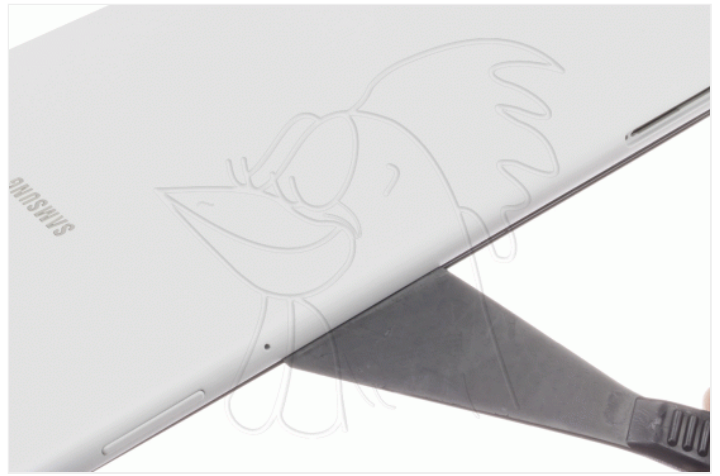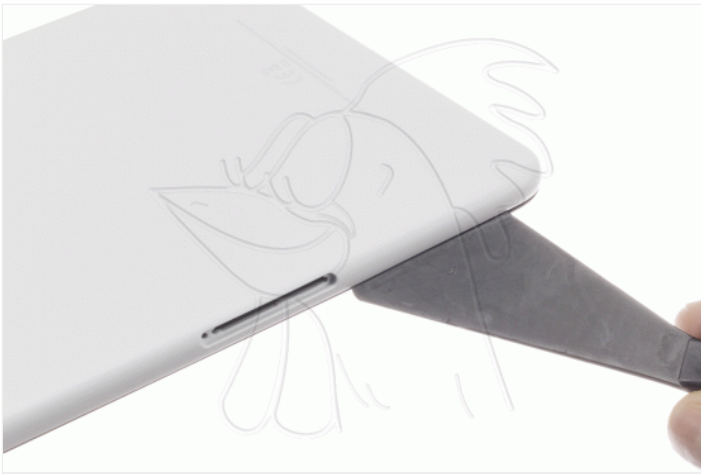

Step 2 - Disconnect components

We disconnect the components of the base plate to be able to later remove it.

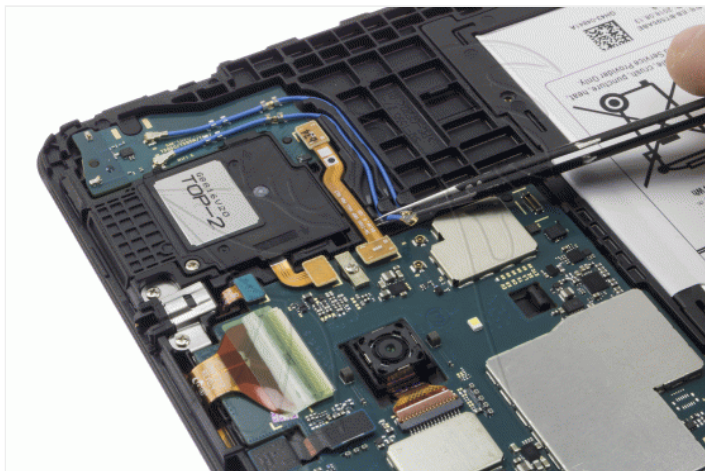

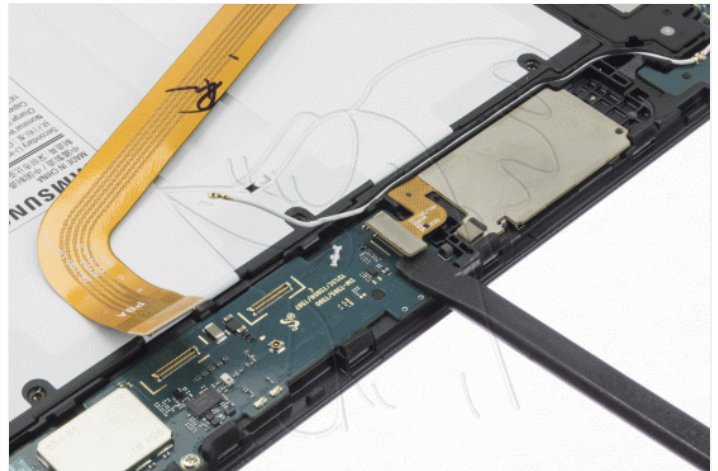

Step 3 - Audio connector

Remove the four Phillips screws (PH # 00) that hold the plate and remove it. Then we remove the two Phillips screws (PH # 00) that hold the shield of the connector and take it off.



