



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Blackview BV7000 Pro Side push button

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Opening tool
Smartphone, tablet

2,19 €



Pinza antiestática
ESD redondeada

3,06 €



Set of professional
tools for opening
smartphones and
tablets

18,97 €



PREMIUM
screwdriver with 24
magnetic
replacement bits

10,41 €

Step 1 - SIM tray

We remove the SIM tray.



Step 2 - Side plates



Unscrew the Torx screws (T4) that hold the side metal plates and remove them.



Step 3 - Back case

Unscrew the Torx screws (T4) that hold the rear housing.




Unscrew the Phillips screws (PH # 00) that hold the protective plate that protects the flex and remove it. We disconnect the flex from the fingerprint reader and remove the back cover.


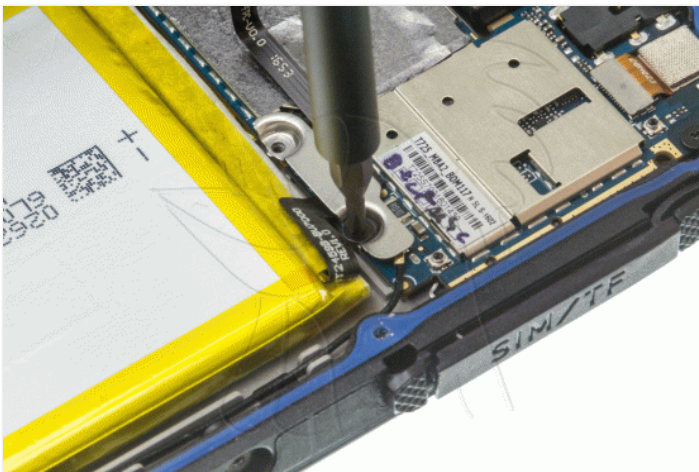
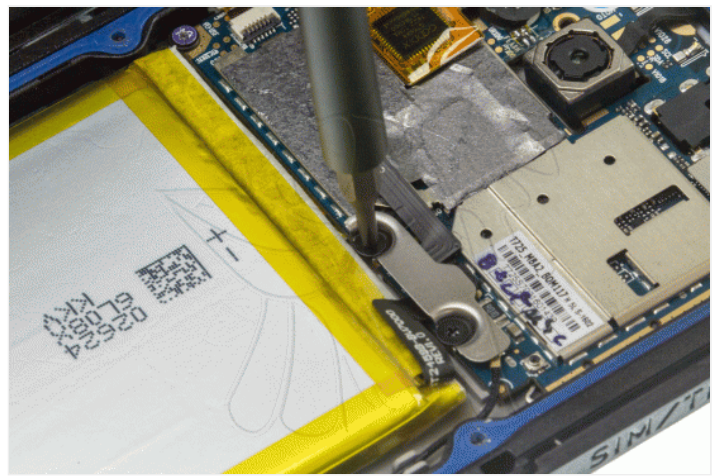




Step 4 - Components


We take off and disconnect the flex from the screen, disconnect the flex from the battery and the coaxial cable, the flex from the side button and the flex from the digitizer.

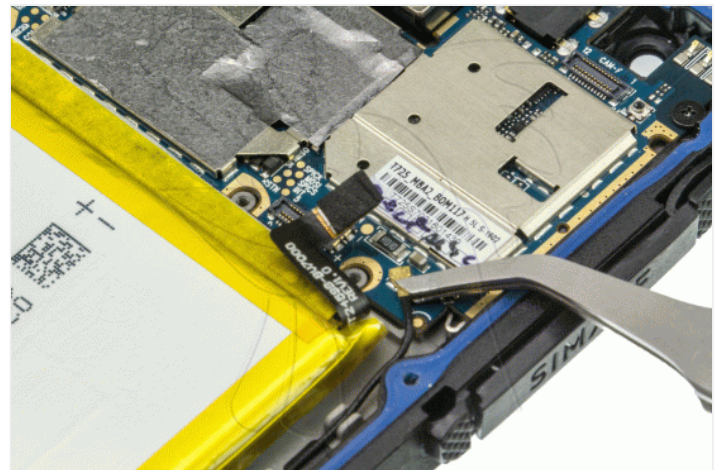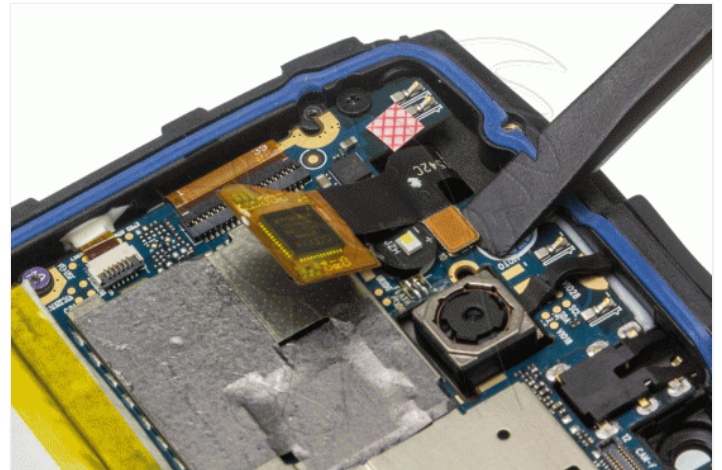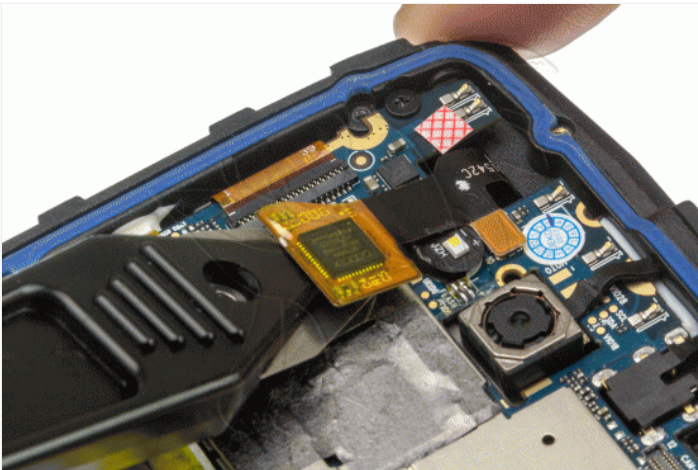

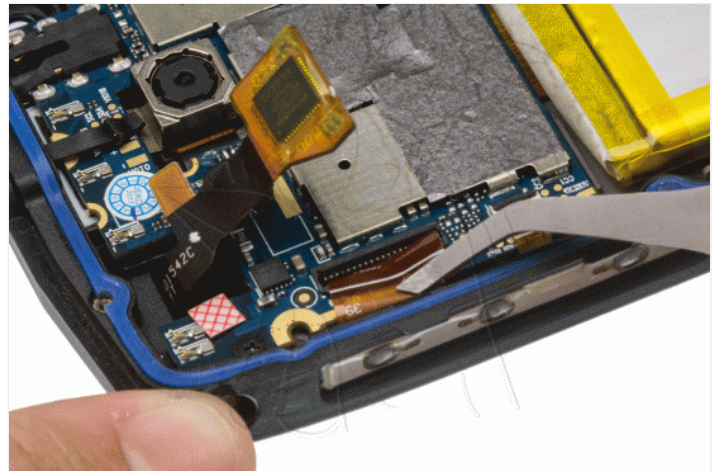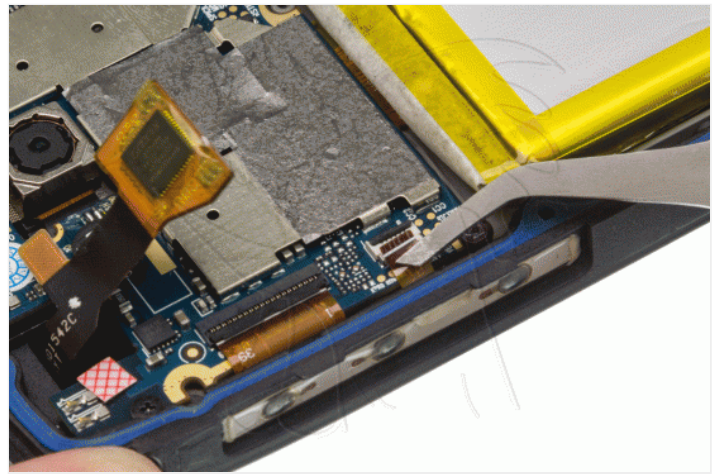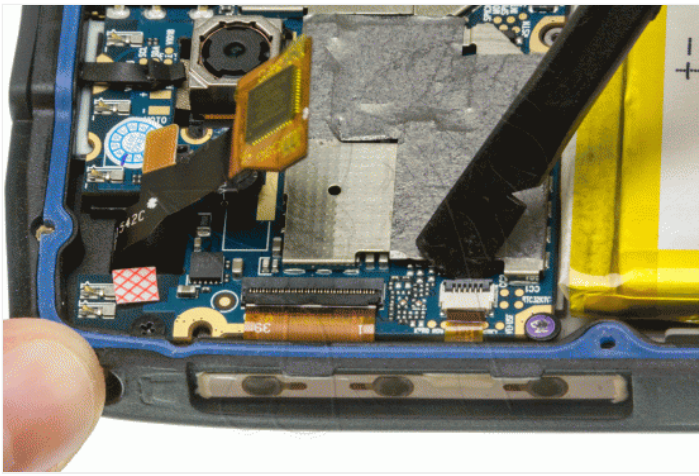

Step 5 - Motherboard

Unscrew the Phillips screws (PH # 00) that hold the motherboard. We disengage it and withdraw it.

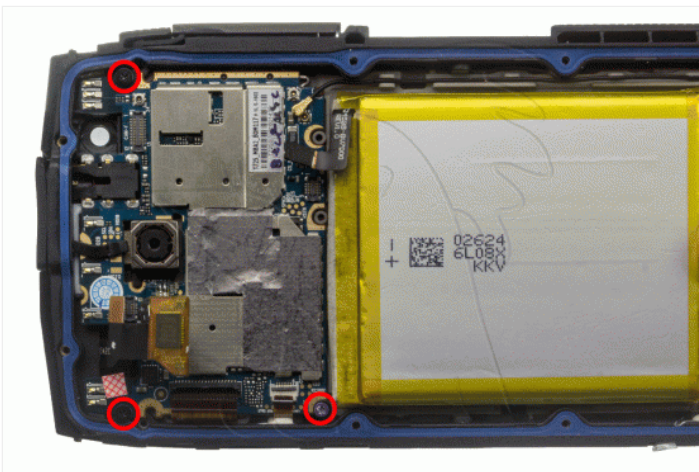



Step 6 - Side push button

We take off the side button and remove it.

