



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Samsung Galaxy A31 Rear cameras

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



48 / 8 / 5 mp triple
main camera for
Samsung Galaxy
A41, SM-A415 /

10,19 €



Heat-opening thermal
mat, CPB320

69,61 €



Opening tool
Smartphone, tablet

2,19 €



Set of professional
tools for opening
smartphones and
tablets

18,97 €



Special SAT 0.75mm
high friction PVC pick

1,07 €




USB rechargeable
wireless screwdriver

36,69 €

Step 1 - Heat application

We start by applying heat to the back of the terminal and with the help of a plastic tool we peel off the adhesive around the entire contour until the battery cover is removed.



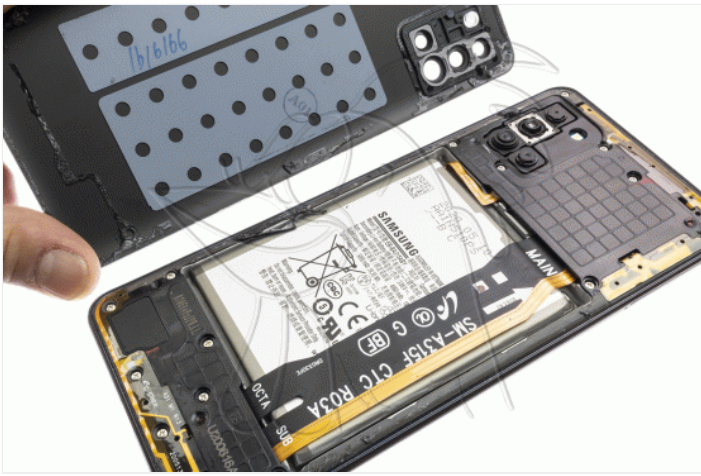

Step 2 - Intermediate housing

With a Phillips-type screwdriver (PH # 00) we remove the fifteen screws that hold the intermediate casing, we remove the sim tray and then with a thin plastic tool we release the casing all the way around until it is separated from the screen.









Step 3 - We disconnect the battery

We disconnect the battery with the help of a fine tool to avoid incidents.





Step 4 - Flex interconexion

Next we remove the interconnection flex by disconnecting it from its end connected to the motherboard

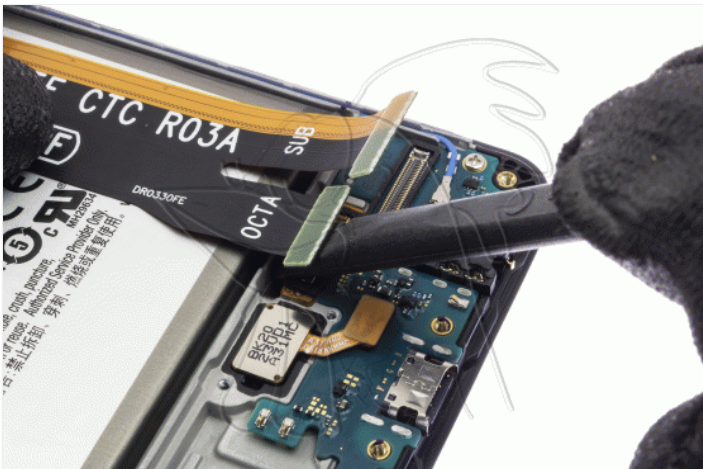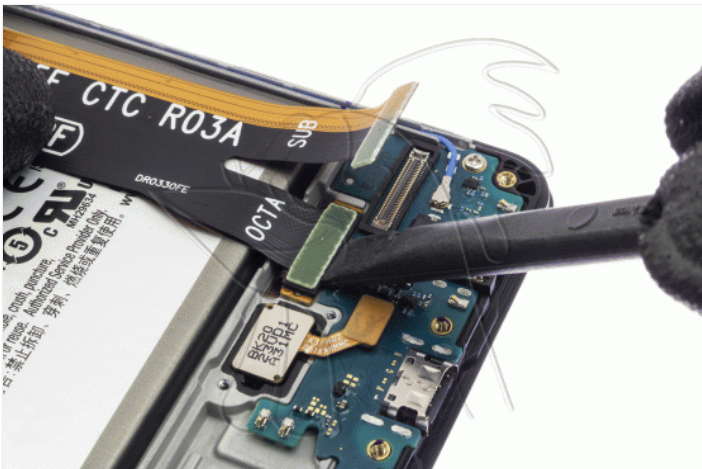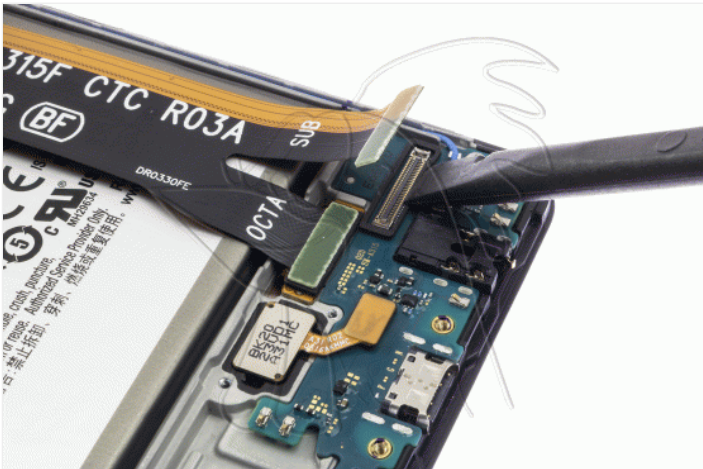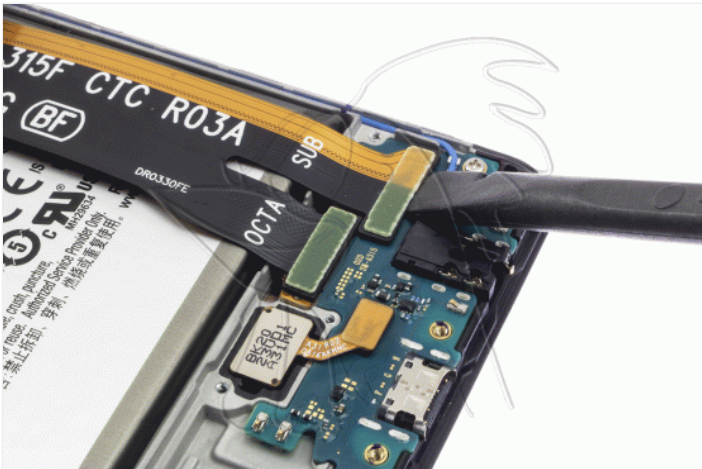

Step 5 - Base Plate

In this step we remove the Phillips type screw (PH # 00) that holds the motherboard to the chassis and then we release all the connections that are on the motherboard to be able to remove it from its housing.

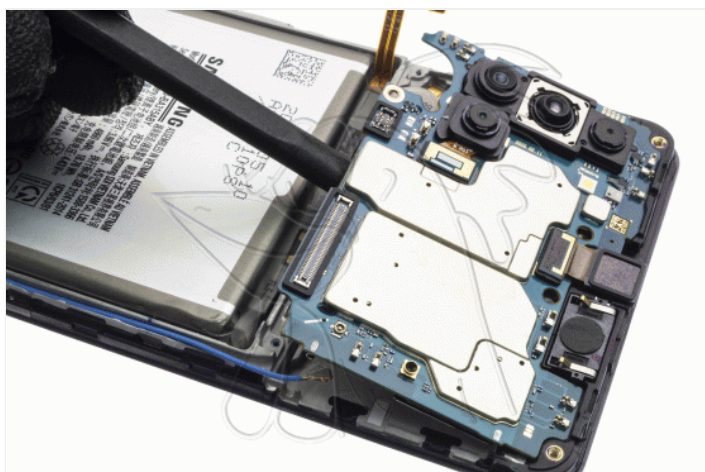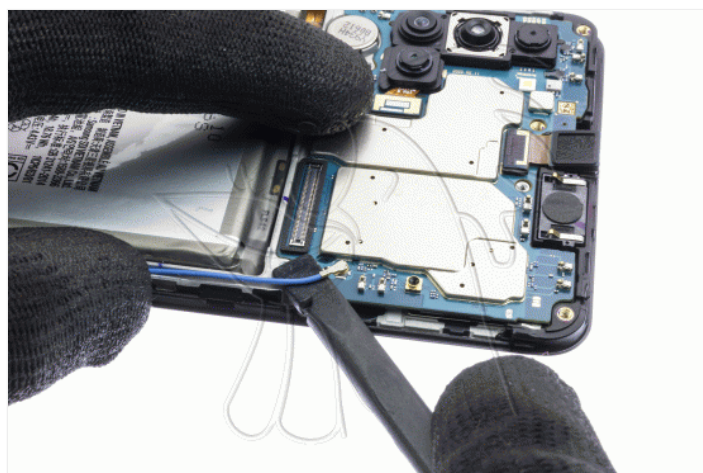

Step 6 - Rear cameras

Once the motherboard is removed, we will disconnect all the cameras, once disconnected, we will extract the camera module from its housing.

