



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Alcatel 1S (2021) Flex assistant the google

For this tutorial you will need the following spared parts and tools that you cant get at our online store [Impextrom.com](https://impextrom.com)
Click on a tool for visit the website.



Flex with Google Assistant push button for Alcatel 1S (2021), 6025H

3,12 €



Screwdriver BEST-927B with 9 different interchangeable bits

3,90 €



Professional disassembly spatula for mobile phones and smartphones

2,71 €



SIM card removal tool for all brands

1,61 €



Opening tool Smartphone, tablet

2,19 €



ESD-12 precision antistatic tweezers with fine tip

2,17 €



Terminal opening tool, plastic

0,71 €

Step 1 - Back case


We will use the extraction tool to remove the SIM tray. Later, with the help of a plastic tool, we will press to release the tabs that join the back cover to the length of the screen. Finally we will take off the fingerprint reader from the back cover to be able to separate it from the screen.





Step 2 - Intermediate shell

We extract the eleven Phillips screws (PH # 00), which hold the intermediate casing that covers the motherboard area, and with the help of a flat tool we will unhook it.

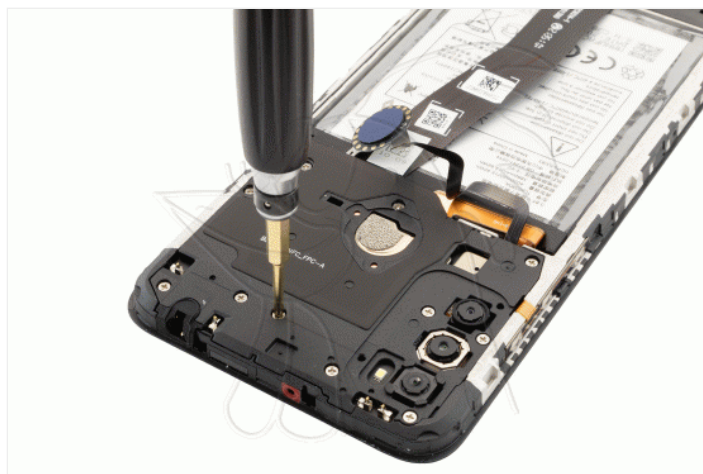



Step 3 - We disconnect battery

We disconnect the battery to work with greater safety.



Step 4 - Fingerprint reader

We disconnect the flex from the fingerprint reader button

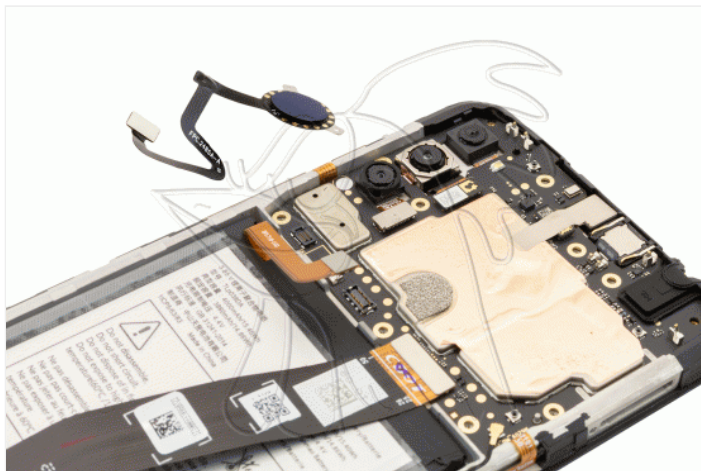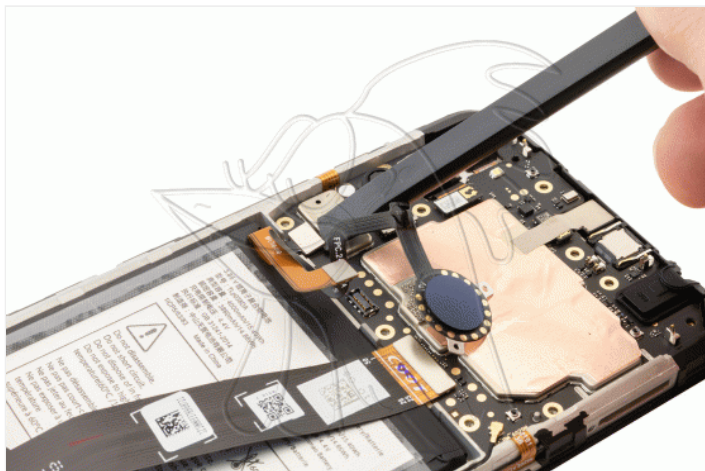

Step 5 - rear cameras

We remove the rear depth camera and the main camera



Step 6 - base plate

We disconnect the flex from the screen and the coaxial antenna cable from the motherboard. Using a flat tool we lift the base plate and extract it



Step 7 - Flex assistant the google

With the help of tweezers we take off the flex of the google assistant from the side frame and the screen chassis

