



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Hisense Infinity F20 Handset

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Set of 5 metal picks
for opening

3,09 €



Screwdriver with 8
heads Peng Fa 7339A

6,96 €



Opening tool
Smartphone, tablet

2,19 €



Pinza antiestática
ESD redondeada

3,06 €



Anti-static tweezer
tips VETUS ESD-249

4,74 €



Touch ESD glove, for
antistatic protection,
size M

4,16 €



Generic earpiece
speaker 15.02 x 6.05
x 2.55 mm

0,88 €

Step 1 - Back case

We will use an opening tool, which we will insert between the housing and the frame to release the notches that hold it.





Step 2 - Remove battery

To remove the battery, we will simply pry with an opening tool or directly with your hands.





Step 3 - Intermediate housing


We start by removing the eleven Phillips screws (PH # 00) that hold the housing. Then, with an opening tool, we will release the notches that hold it.





Step 4 - Removing the motherboard

We disconnect the components of the base plate and take off the push button flex. When lifting the plate, we will have to disconnect the interconnection flex and the coaxial antenna cable.

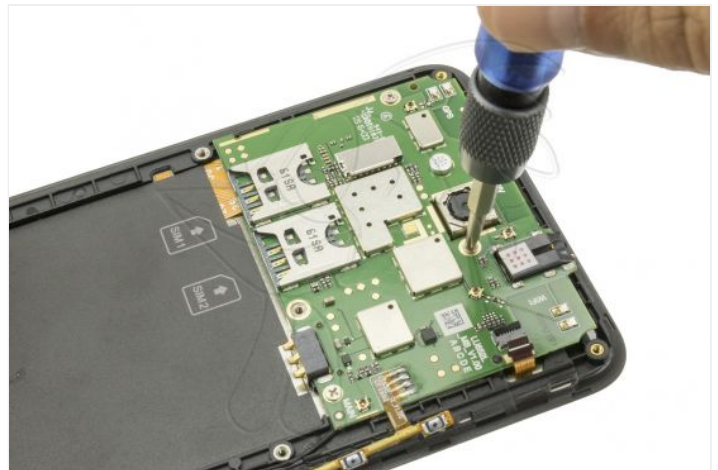



Step 5 - Handset

All that remains is to take off the headset from the chassis.

