



Nadiemellamagallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Meizu Pro 6 Frontal camera

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Pinza antiestática
curva Baku ESD BK-
15

3,50 €



SIM card removal
tool for all brands

1,61 €



Opening tool
Smartphone, tablet

2,19 €



Special SAT 0.70mm
PET pick, high friction
and resistance

1,25 €



Smartphones and PC
repair tool case

35,92 €

Step 1 - Screws and tray

Remove the 2 Pentalobe screws from the bottom of the phone, and also remove the tray from the cards.





Step 2 - Fullscreen

We apply heat to the screen, and with a plastic tine we carefully take off all the edges of the screen. Once the screen is detached we must remove the 2 Phillips screws (PH # 00) that hold the shield of the screen connectors.






Step 3 - Adhesives


Remove the stickers that bother us to continue dismantling the phone.



Step 4 - Shields

We remove the shields from the motherboard. All screws are Phillips (PH # 00).

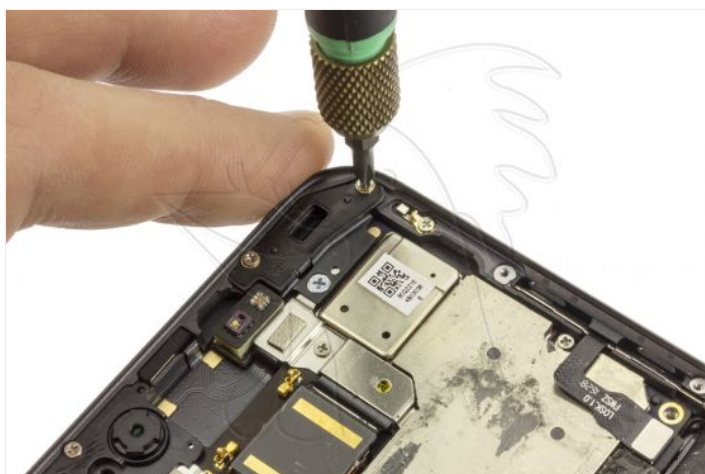


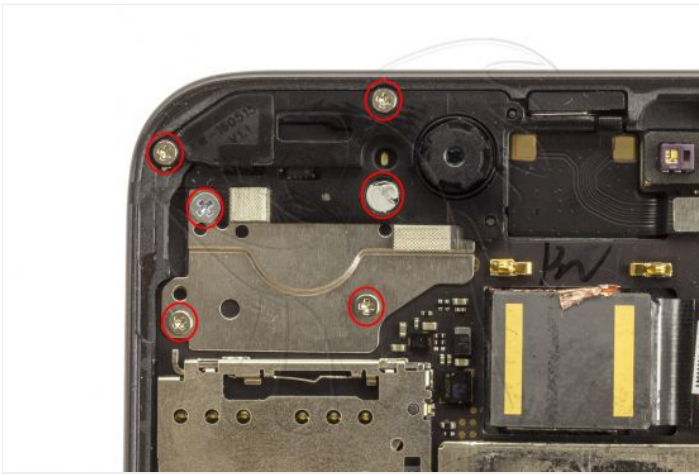

Step 5 - Motherboard

Disconnect the flex that are connected to the motherboard, remove the 2 Phillips screws (PH # 00) that hold the motherboard, lift and disconnect the coaxial cable.



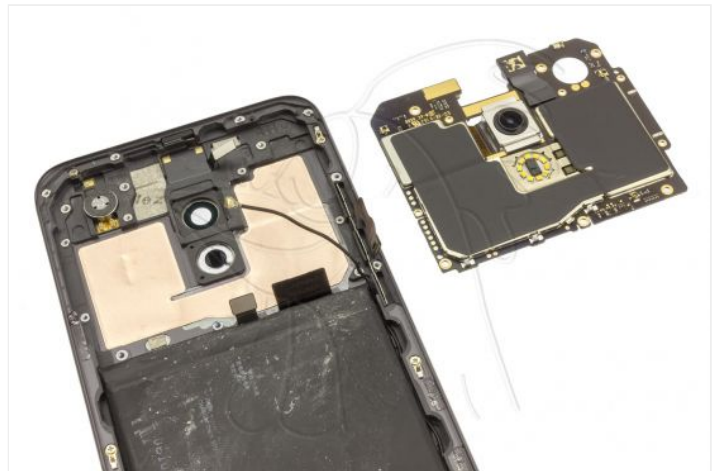

Step 6 - Frontal camera

We disconnected the camera that we are going to replace.

