



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Gigaset GS270 Fullscreen

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Head made of synthetic carbon steel with titanium handle

18,63 €



Heat-opening thermal mat, CPB320

69,61 €



Double SMD soldering station, Baku 878

59,85 €



Pinza antiestática curva Baku ESD BK-15

3,50 €



SIM card removal tool for all brands

1,61 €



Opening tool Smartphone, tablet

2,19 €



Set with screwdriver and 6 bits BST-8927B

8,82 €



Set of professional tools for opening smartphones and tablets

18,97 €



Special SAT 0.75mm high friction PVC pick

1,07 €



Touch ESD glove, for antistatic protection, size M

4,16 €



Antistatic and ESD tactile glove, size S

5,30 €

Step 1 - Tray

To begin we must extract the tray of the cards.





Step 2 - Back case


Unhook all the edges of the back cover.






Step 3 - Antenna module with loudspeaker

We extract the 7 Phillips screws (PH # 00) that hold the module, and we can unhook it.

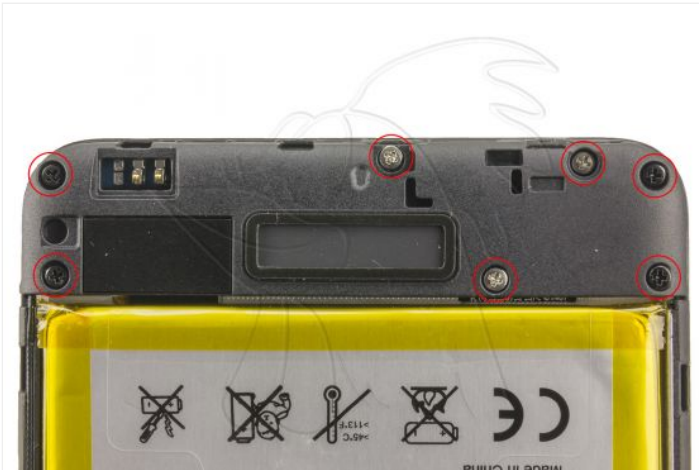

Step 4 - Upper housing


Remove the 6 Phillips screws (PH # 00) and unhook the intermediate housing.

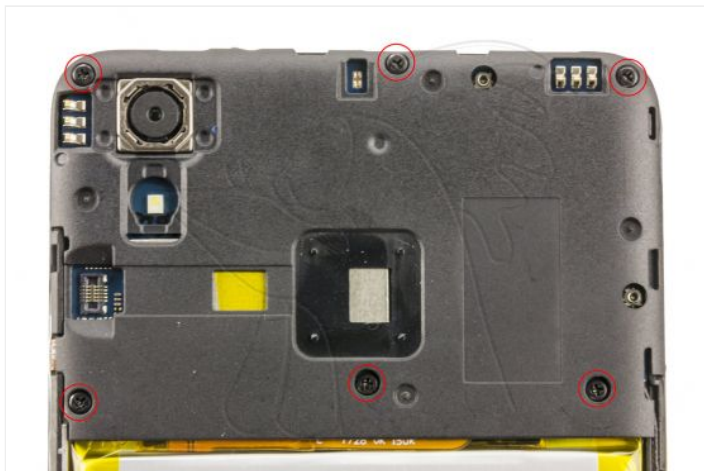

Step 5 - Components

We disconnect all the components that are connected to the motherboard, lift it and disconnect from the back of the motherboard the flex of the screen.



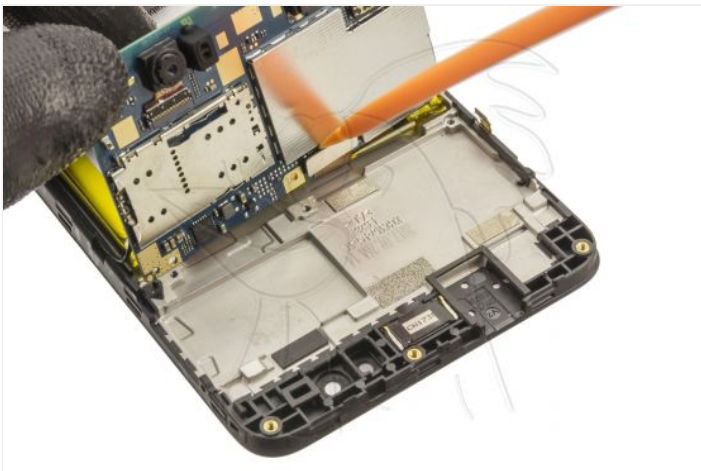

Step 6 - Battery


We take off the battery.



Step 7 - Vibrator and auxiliary plate

We disconnect all the components of the auxiliary plate, desoldamos the vibrator, and remove both the vibrator and the auxiliary plate.



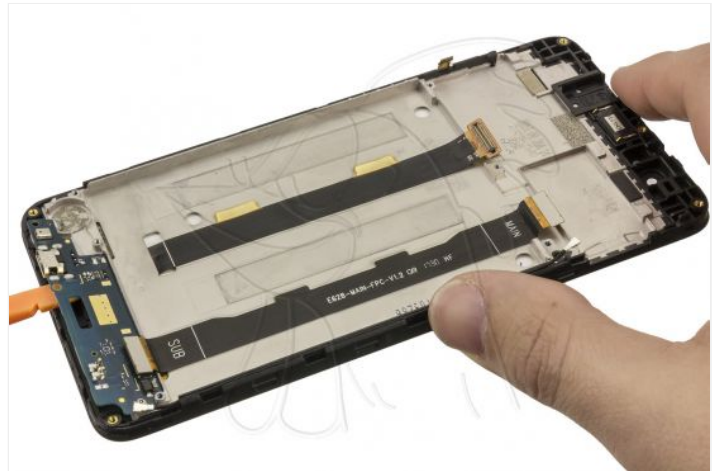

Step 8 - Fullscreen

We apply heat to the screen, to soften the adhesive, and with the help of one or more prongs we will gradually take off all the edges of the screen.

