



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Apple iPhone Xs Max Speaker

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Opening tool
Smartphone, tablet

2,19 €



Set with screwdriver
and 6 bits BST-8927B

8,82 €



Pinza antiestática
ESD redondeada

3,07 €



Set of professional
tools for opening
smartphones and
tablets

18,97 €



Suction cup to
separate screens in
general

5,25 €



PREMIUM
screwdriver with 24
magnetic
replacement bits

10,41 €



Buzzer speaker for
Phone Xs Max
(A2101)

1,83 €

Step 1 - Take off screen

We will start by taking the screen. To do this, first remove the two Pentalobe 0.8 screws (TS1) that hold the screen to the housing.
Then, using a suction cup, we will make room to introduce a flat tool and remove the strip of adhesive that holds it.









Step 2 - Disconnect screen

Now we will have to remove the shielding from the connectors on the motherboard. For this we will remove the five Triwing screws (Y0.6) that hold it.

Once the shield has been removed, we will disconnect the flexes from the screen and the headset.

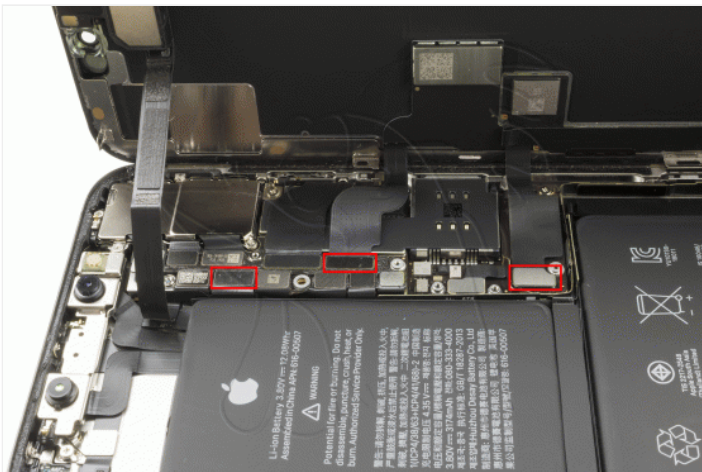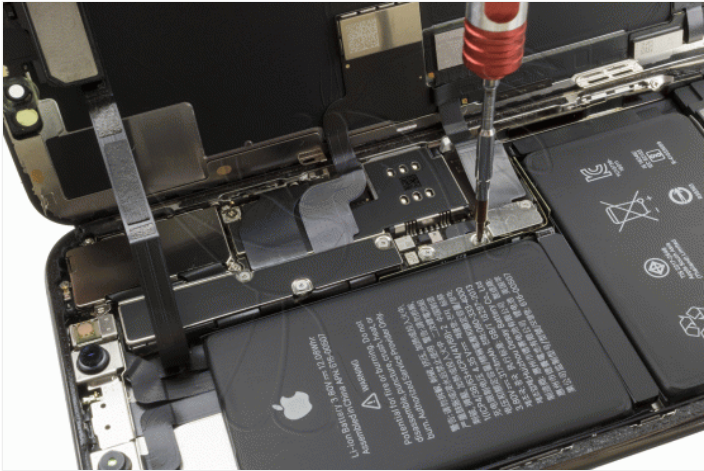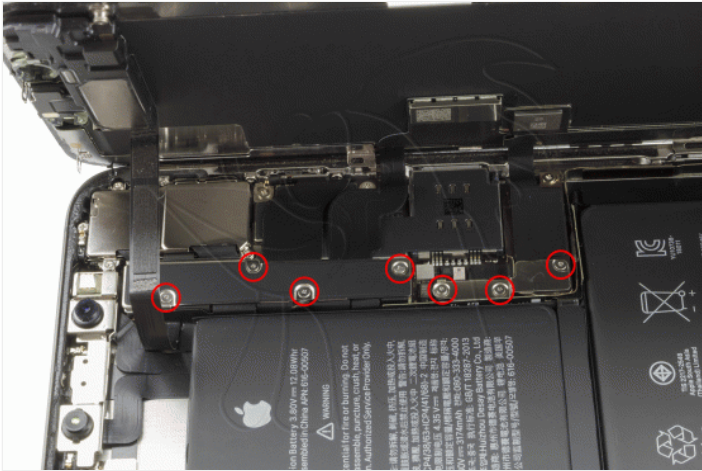

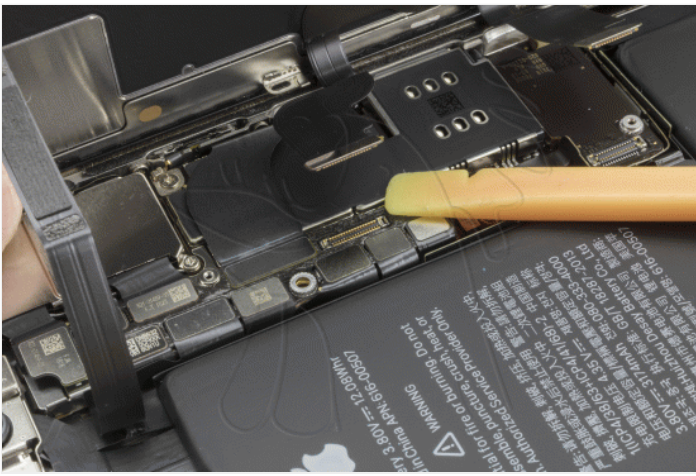


Step 3 - Remove shielding with antenna contacts

Remove the five Triwing screws (Y0.6) that hold the shield and remove it.

Now we will remove the screws that hold the speaker. A Phillips (PH # 00), a standoff and a triwing (Y0.6) that holds the shield of the speaker connector, which we will disconnect.



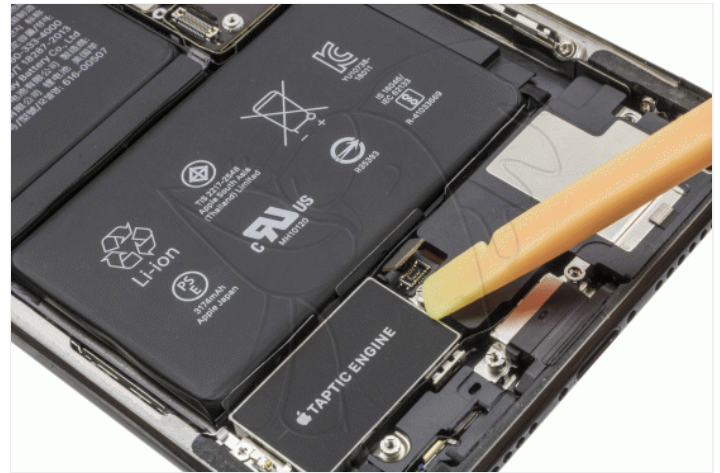

Step 4 - Speaker

To finish, we remove the last standoff screw that holds the speaker and take off the adhesive strip that holds it to the vibrator.



