



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Nokia 5.1 Side push buttons

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Side volume and power pushbuttons flex for Nokia 5.1 (TA-1075)

1,51 €



Set of 5 metal picks for opening

3,09 €



SIM card removal tool for all brands

1,61 €



Pinza antiestática ESD redondeada

3,06 €



Set of professional tools for opening smartphones and tablets

18,97 €



PREMIUM screwdriver with 24 magnetic replacement bits

10,41 €

Step 1 - SIM tray

With a SIM extraction tool we remove the two trays.





Step 2 - Back case

Remove the Torx screws (T3) that hold the rear housing.

We introduce a plectrum and perform all the contour by releasing the back shell.







Step 3 - Protective sheet

Remove the Torx screws (T4) with a screwdriver. We take out the protective sheet.

We disconnect the flex from the fingerprint reader.

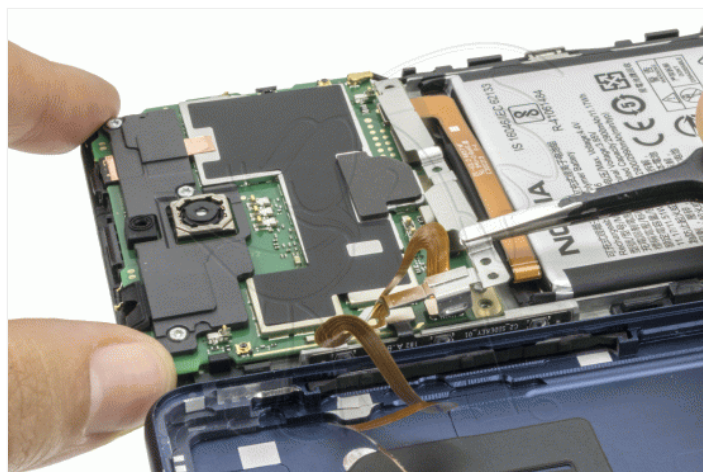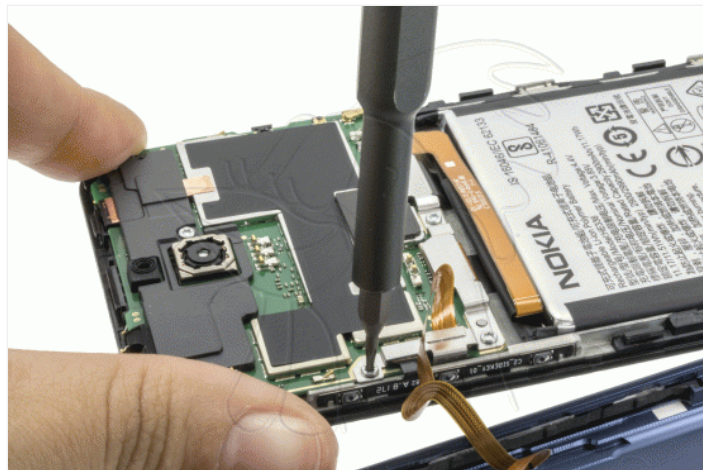



Step 4 - Side push buttons

We disconnect the flex from the lateral push button.

We take off the side button little by little and remove it.

