



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Motorola Moto E5 Plus Drums

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



1/CP5/66/86 battery
for Motorola Moto E4
Plus, XT1771 Moto
E5 Plus (XT1924) -

11,06 €



Heat-opening thermal
mat, CPB320

69,61 €



SIM card removal
tool for all brands

1,61 €



Opening tool
Smartphone, tablet

2,19 €



Professional opening
plastic tool, iPlastix

7,56 €



Pinza antiestática
ESD redondeada

3,06 €



Flexible plastic card
for easy opening

0,98 €



Set of professional
tools for opening
smartphones and
tablets

18,97 €



Special SAT 0.75mm
high friction PVC pick

1,07 €



6-in-1 screwdriver, K-
8107 with different
heads, in blister

7,52 €

Step 1 - SIM tray

With a SIM removal tool, remove the SIM tray.





Step 2 - Back case

We heat the terminal with a thermal mat at 80° for a minute and a half.

We introduce an opening tool between the back shell and the terminal to be able to introduce then a plastic spike and make, with care, the contour, taking off the back cover.

With an opening card we just separated the back cover.







Step 3 - Fingerprint reader


Unscrew the Phillips screws (PH # 00) that hold the metal plate that covers the connector of the fingerprint reader.



We remove the metal sheet. We disconnect the flex from the fingerprint reader.

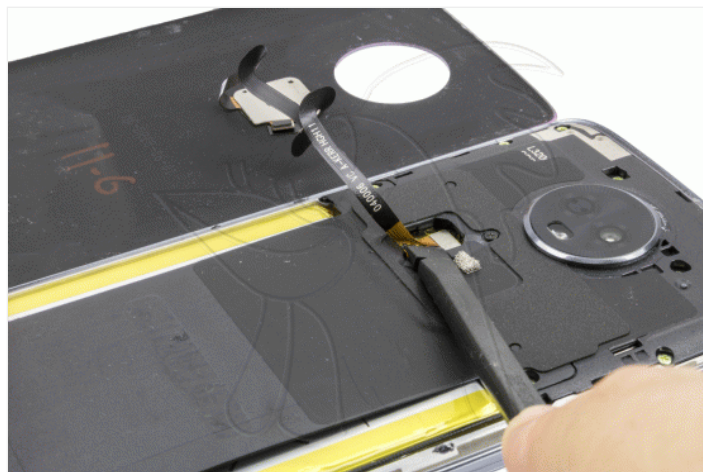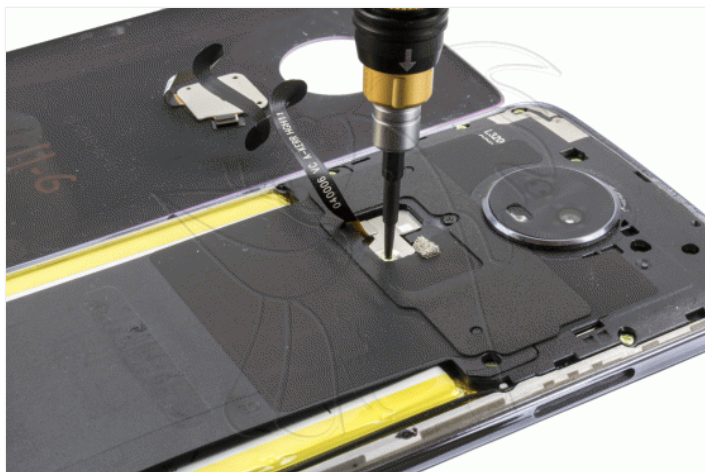

Step 4 - Intermediate housing

Unscrew the Phillips screws (PH # 00) that hold the intermediate housing with the terminal. We remove it.

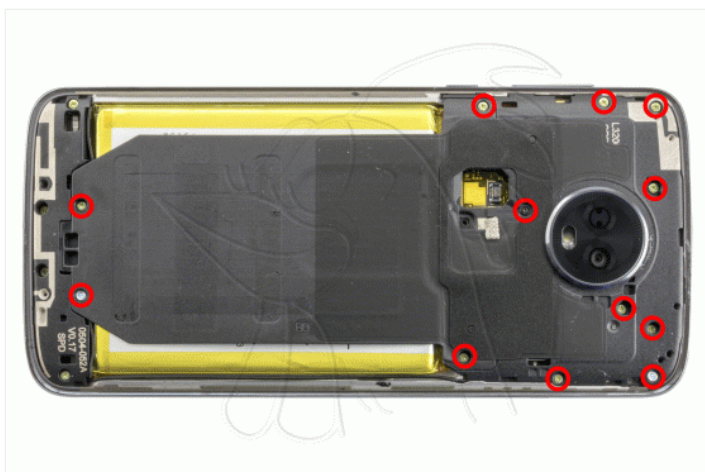

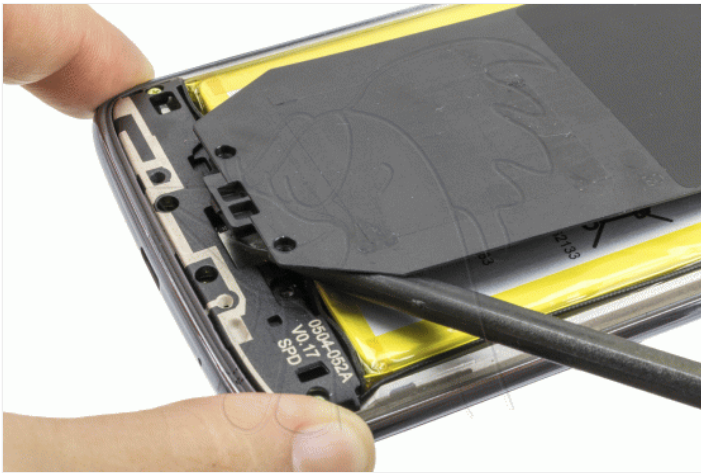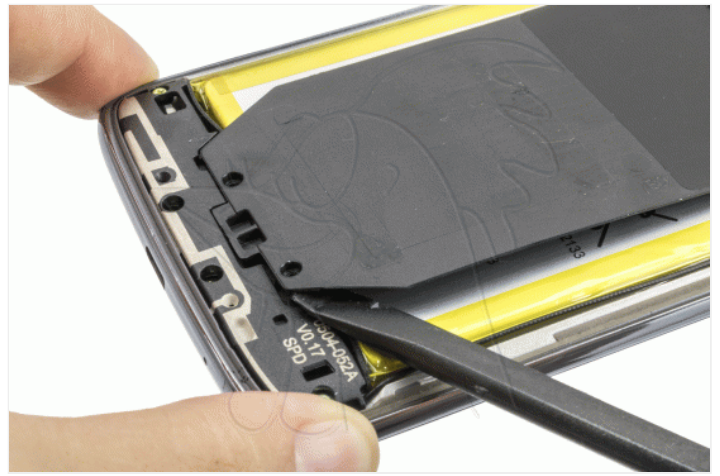

Step 5 - Drums

We disconnected the flex from the battery.

We take off the battery introducing an opening tool. We will be careful not to hook the flexes of the screen and the interconnection flex so as not to break them.

We took the battery completely and removed it.

