



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Hisense Infinity H11 Lite Motherboard

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



SIM card removal
tool for all brands

1,61 €



Opening tool
Smartphone, tablet

2,19 €



Pinza antiestática
ESD redondeada

3,06 €



Set of professional
tools for opening
smartphones and
tablets

18,97 €



6-in-1 screwdriver, K-
8107 with different
heads, in blister

7,52 €

Step 1 - Back case

With a SIM removal tool we remove the SIM tray from the terminal.

We introduce an opening tool between the back cover and the mobile. We do all the contour separating the back cover until it is removed.











Step 2 - Fingerprint reader

We disconnect the flex from the fingerprint reader.






Unscrew the Phillips screws (PH # 00) that hold the protective plate.


We remove the fingerprint reader.

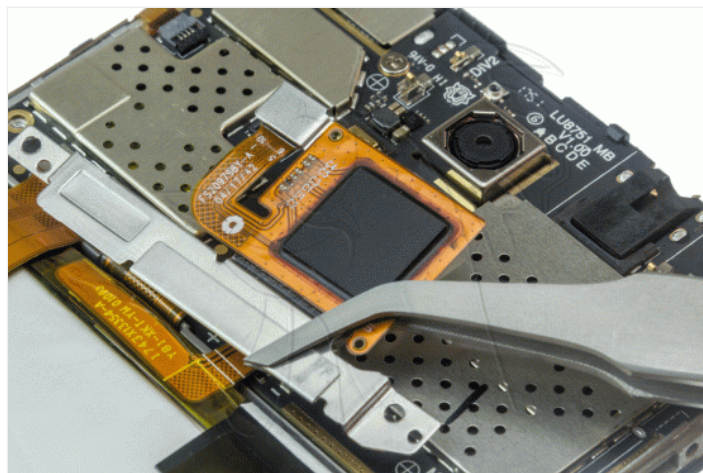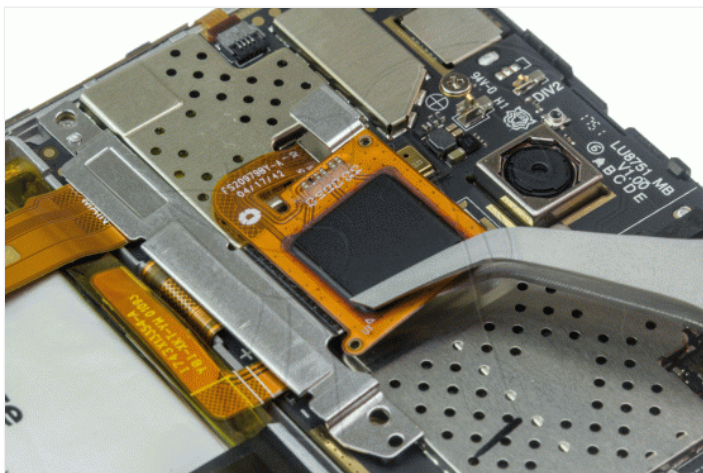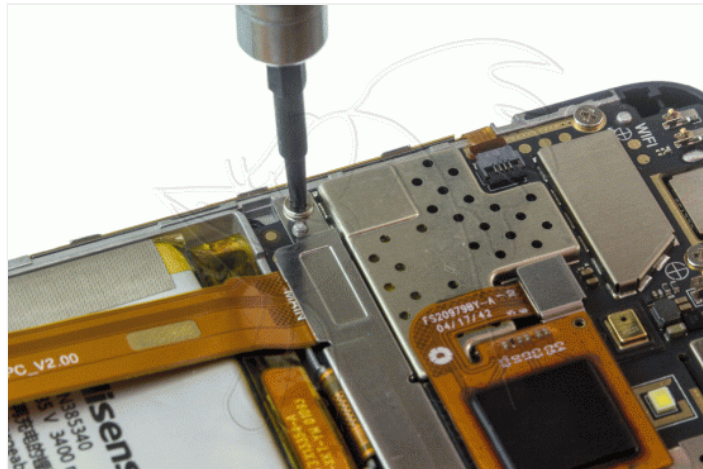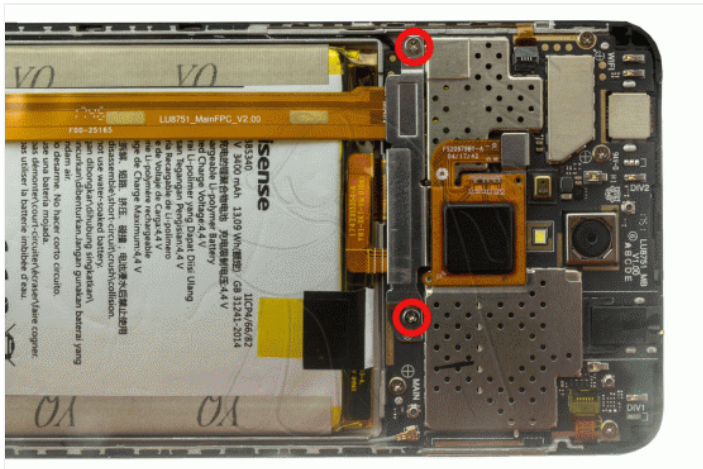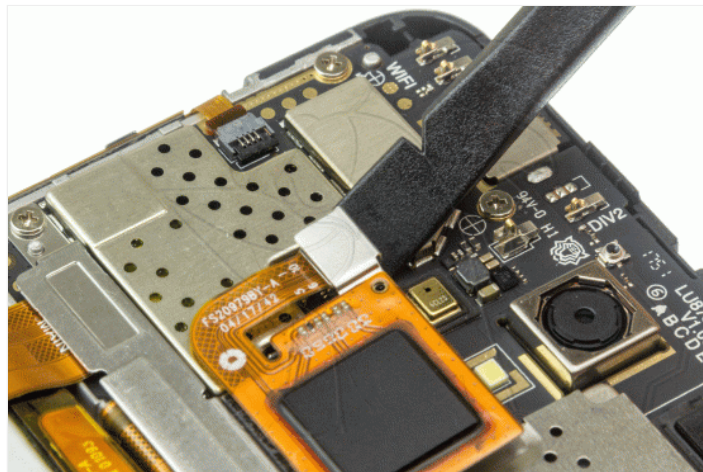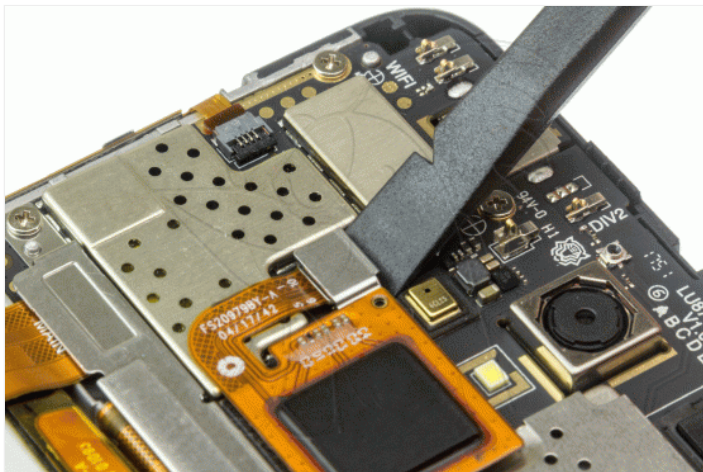

Step 3 - Components

We disconnect the coaxial cable. We disconnect the lateral push button and the digitizer flex.

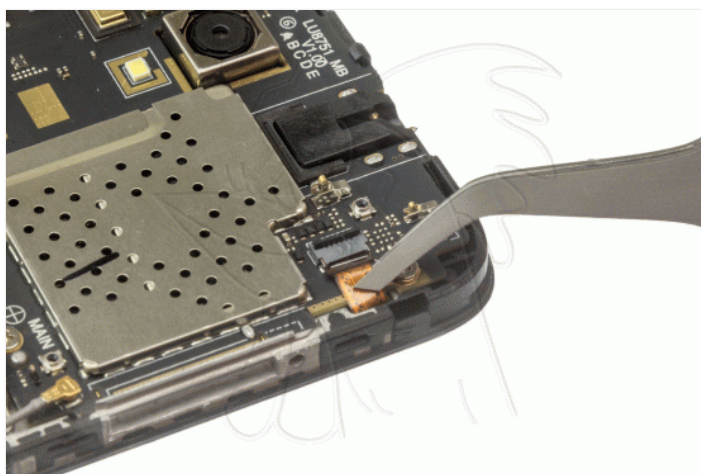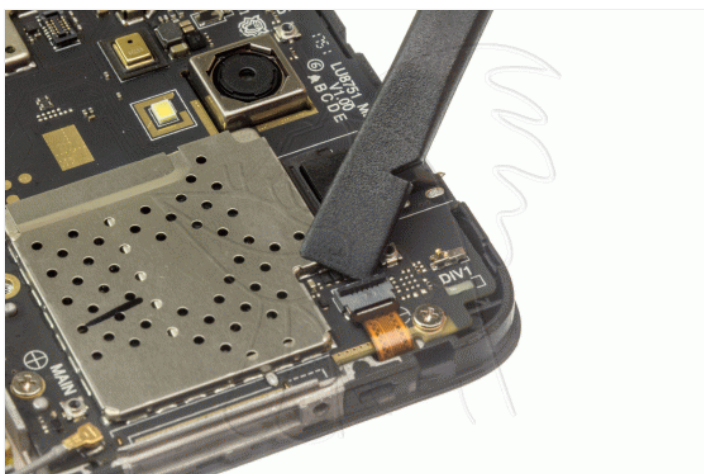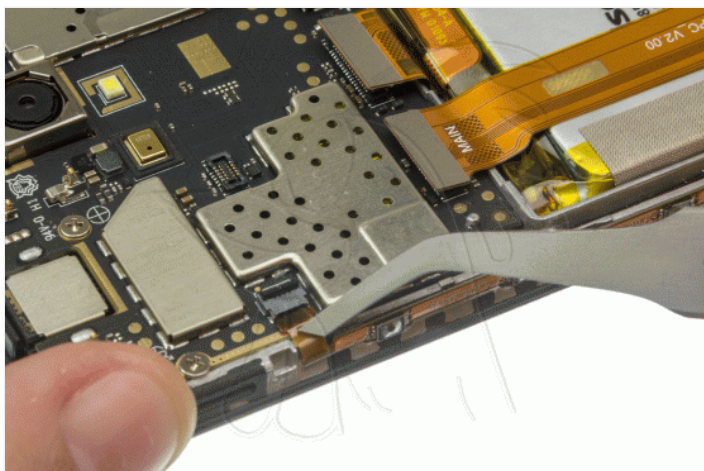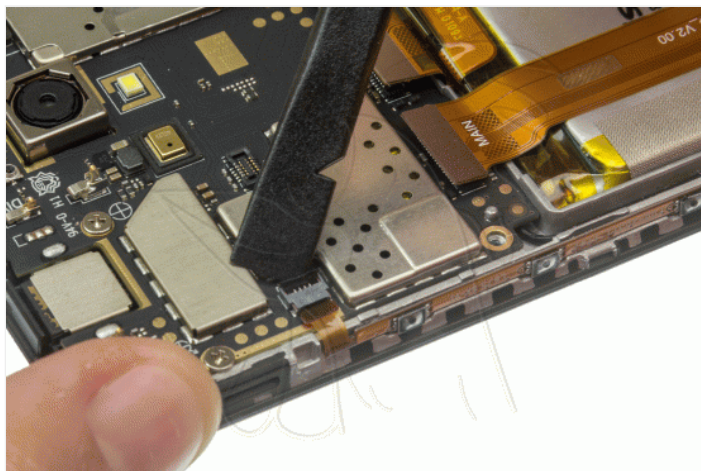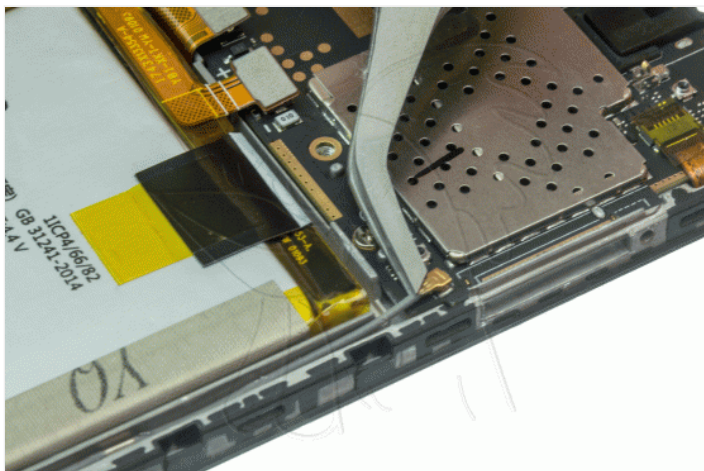


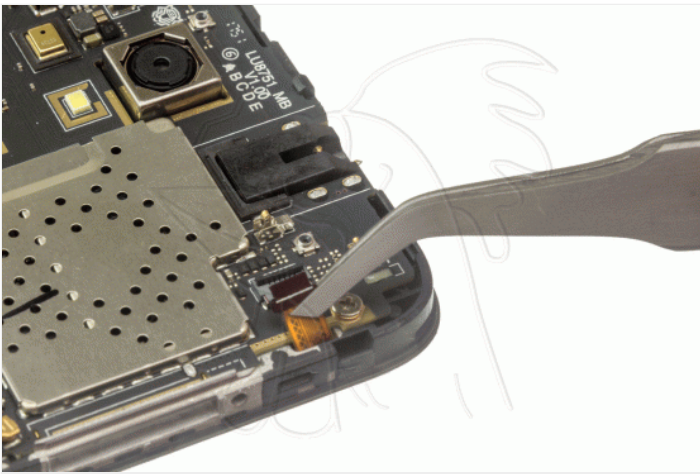



Step 4 - Motherboard

Unscrew the Phillips screws (PH # 00) that hold the motherboard.

Disengage the base plate, without removing it completely.

We disconnected another coaxial cable that holds the motherboard.

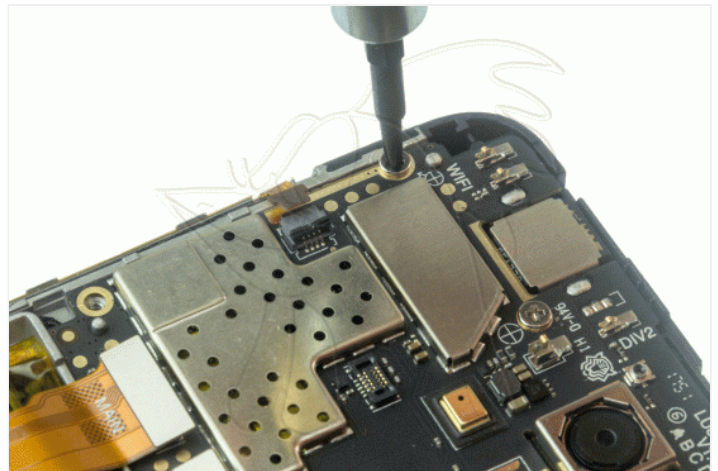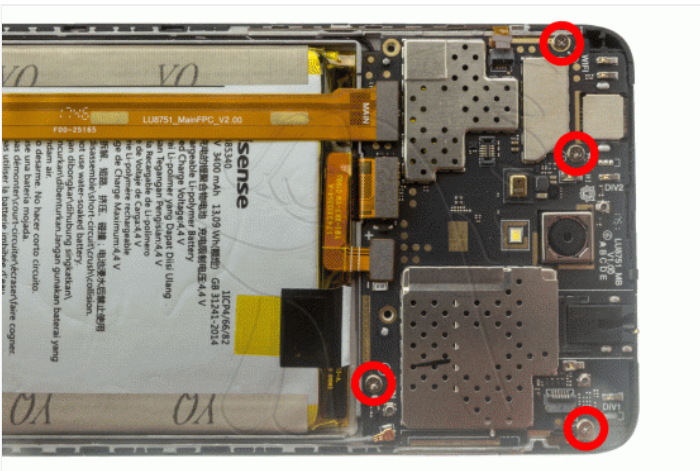

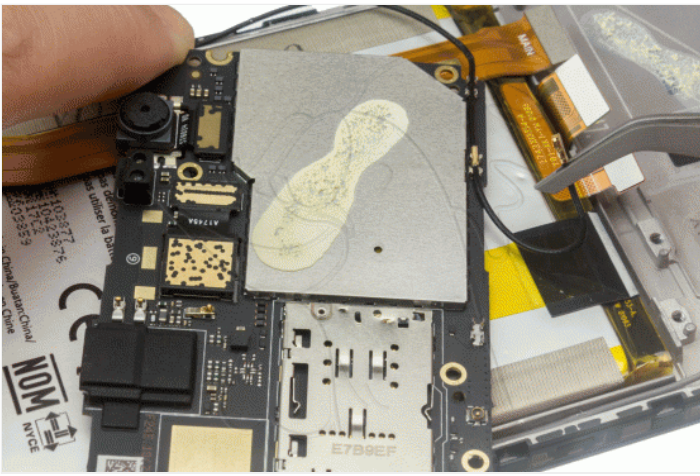

Step 5 - Motherboard

Disconnect and remove the cameras

