



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Samsung Galaxy Tab A 2019 (T510) Auxiliary plate with charging connector

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Service Pack
Auxiliary board with
USB type C charging
connector for

10,82 €



Set of 5 metal picks
for opening

3,09 €



Heat-opening thermal
mat, CPB320

69,61 €



SIM card removal
tool for all brands

1,61 €



Opening tool
Smartphone, tablet

2,19 €



Pinza antiestática
ESD redondeada

3,06 €



Set of professional
tools for opening
smartphones and
tablets

18,97 €




Special SAT 0.75mm
high friction PVC pick

1,07 €



6-in-1 screwdriver, K-
8107 with different
heads, in blister

7,52 €



PREMIUM quality
auxiliary boards with
components for
Samsung Galaxy Tab

8,94 €

Step 1 - SIM tray


With a SIM removal tool we remove the SIM tray.





Step 2 - screen





We heat the screen to a temperature of eighty degrees for two minutes. We introduce a metal prong between the housing and the screen. Once introduced, we exchange it with a plastic pick to avoid scratching the casing. We do all the contour taking off the screen.

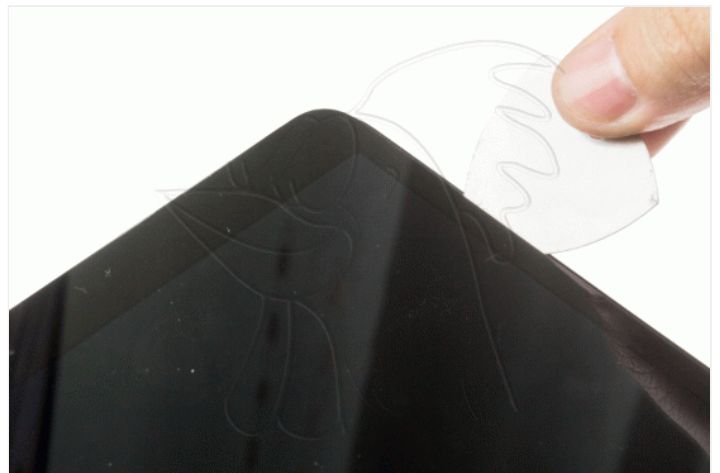





Step 3 - screen

We take off the screen and disconnect the flex that joins the screen with the motherboard and remove it.

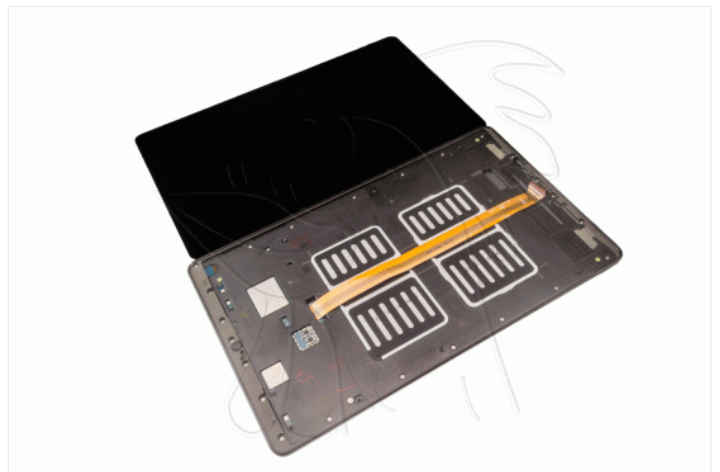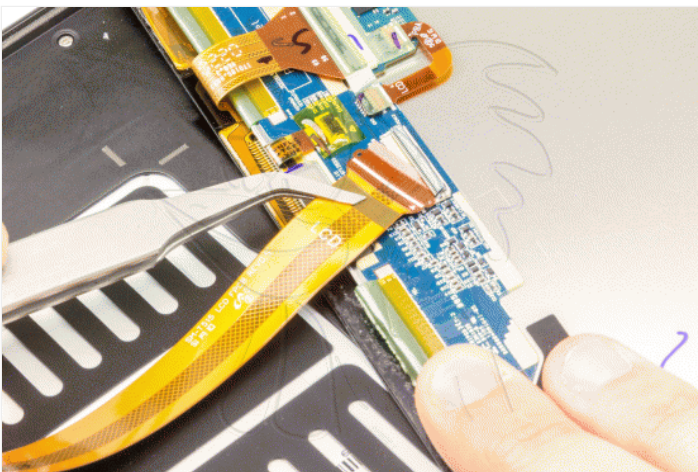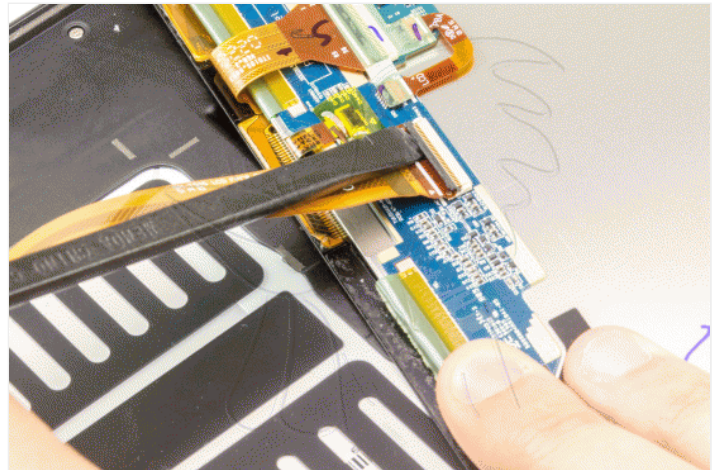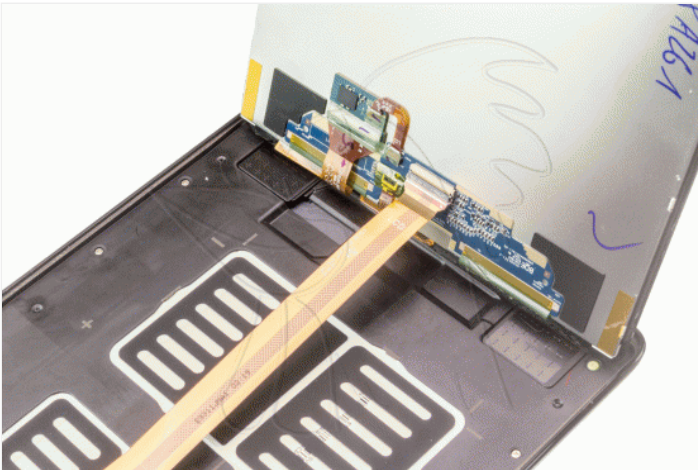

Step 4 - Central housing

Unscrew the Phillips screws (PH # 00) that hold the center housing, unhook it and remove it.

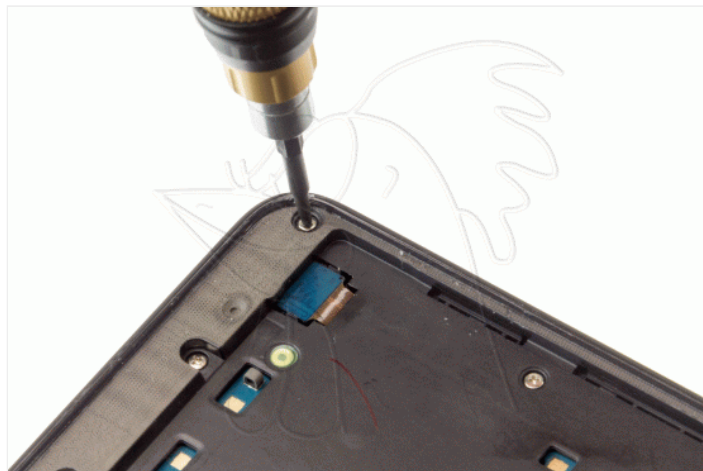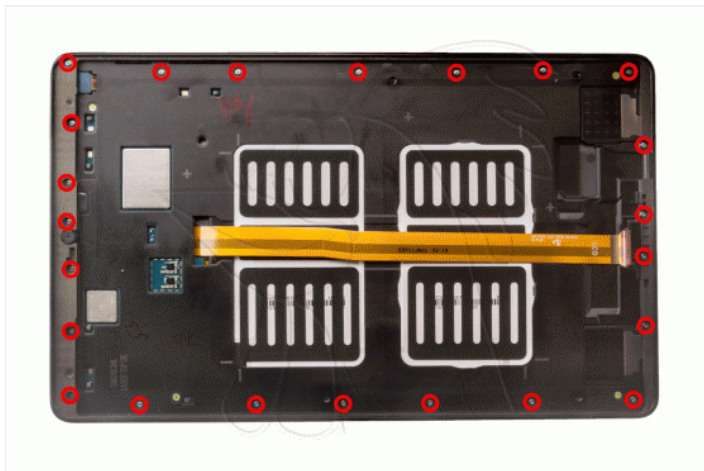

Step 5 - Auxiliary plate with charging connector

We disconnected the flex from the left speaker, the interconnection speaker and the right speaker.

We take off the auxiliary plate and remove it.

