



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Xiaomi Mi6 Flex with side push buttons

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



Flex side volume and power buttons for Xiaomi Mi6

1,29 €



BK-7275 (A Version)
5 in 1 screwdriver

6,41 €



Pinza antiestática curva Baku ESD BK-15

3,50 €



SIM card removal tool for all brands

1,61 €



Opening tool Smartphone, tablet

2,19 €



Suction cup for disassembling and repairing

0,51 €



Touch ESD glove, for antistatic protection, size M

4,16 €



Antistatic and ESD tactile glove, size S

5,30 €

Step 1 - Tray

We remove the tray.





Step 2 - Back case



To remove the back cover we will use a suction cup, with which we will lift the casing just enough to insert a flat tool and we will clear all the edges of the casing.







Step 3 - Intermediate housing with NFC antenna

Remove the 9 Phillips screws (PH # 00) and we can unhook the case.

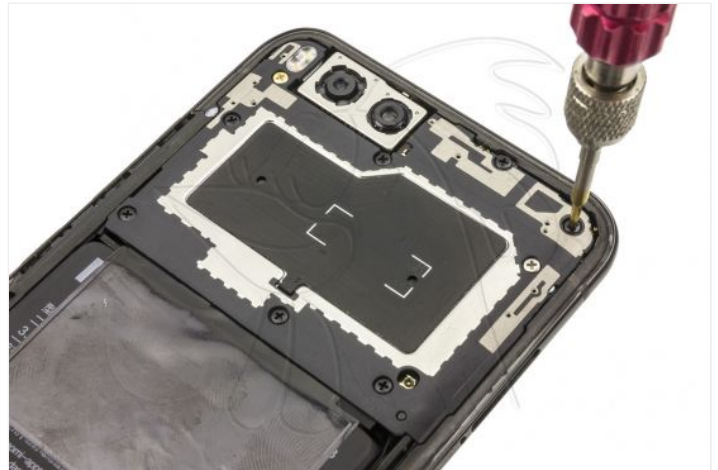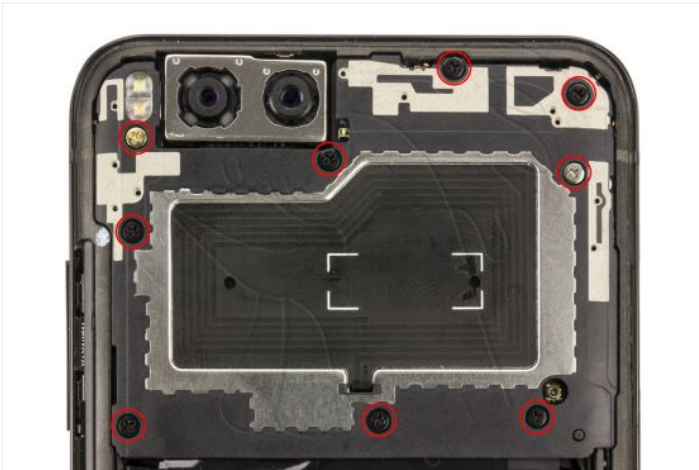

Step 4 - Components

We disconnect all the components that are connected to the motherboard.

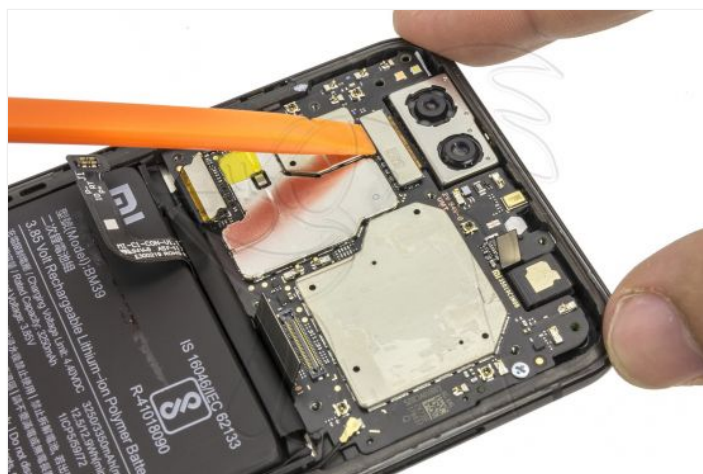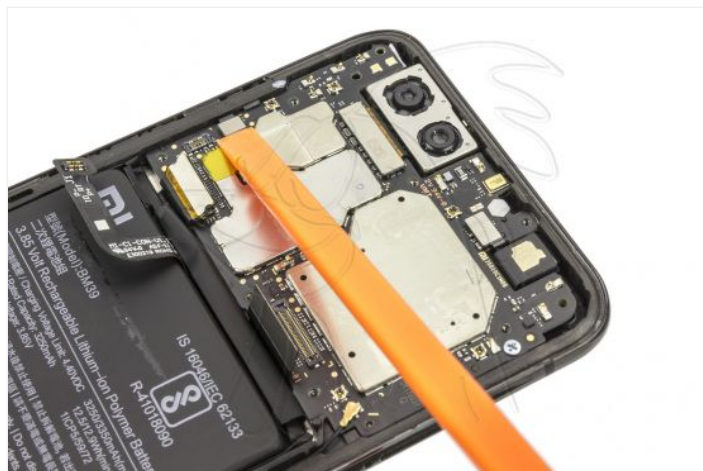



Step 5 - Motherboard

We extract the Phillips screws (PH # 00) that hold the motherboard and we can remove it.





Step 6 - Side keys

Take off the plastic cover that protects the flex, and underneath there is a small shield that when you remove it, the keys will be released.



Step 7 - Flex with side push buttons

Remove the rubber that is in the hole where the flex passes, and take off the area of ??the buttons.

