



NadieMeLlamaGallina.com

Porque Yo Lo Reparo

Step by step tutorial: of Xiaomi Mi Max 3 Drums

For this tutorial you will need the following spared parts and tools that you cant get at our online store Impextrom.com
Click on a tool for visit the website.



BM51 battery for
Xiaomi Mi Max 3 -
5400mAh / 3.85V /
20.8Wh / Li-ion

23,67 €



SIM card removal
tool for all brands

1,61 €



Professional opening
plastic tool, iPlastix

7,56 €



Pinza antiestática
ESD redondeada

3,06 €



Set of professional
tools for opening
smartphones and
tablets

18,97 €



6-in-1 screwdriver, K-
8107 with different
heads, in blister

7,52 €

Step 1 - SIM tray

With a SIM removal tool we remove the SIM tray.





Step 2 - Back case

Remove the Pentalobe screws (TS1) with a precision screwdriver.

With an opening tool, we pry the outline of the back shell and separate it carefully.


Disconnect the flex from the footprint reader of the motherboard and remove the back cover






Step 3 - Protective sheet

Remove the sticker and unscrew the Phillips screws (PH # 00) that hold the protective plate with the base plate. We remove it.

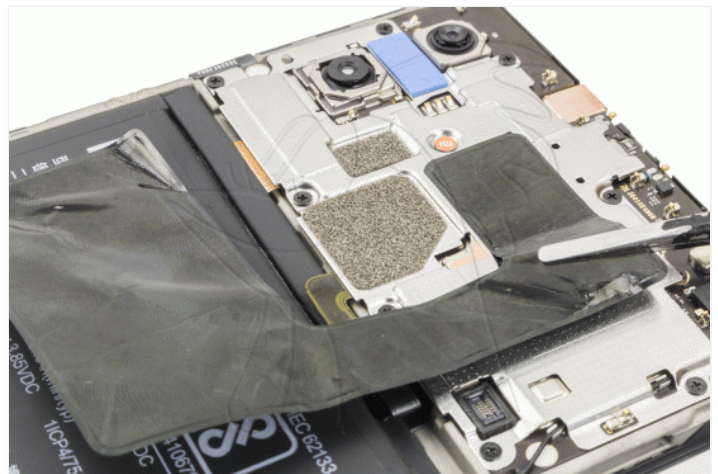

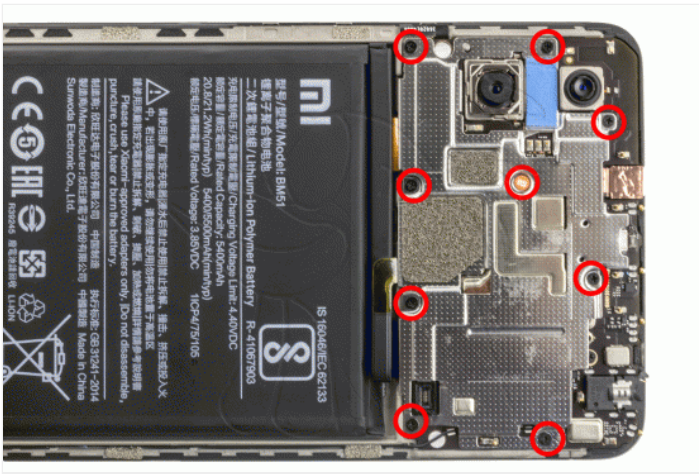

Step 4 - Drums

We disconnected the flex from the battery.

Remove the stickers with glue that hold the battery. And we remove it with care when taking it off in case there is any trace of glue left.



